



Installation Instructions

for Connecting Multiple Linear Extrusions

1. Install as per Electrical Code by a certified Electrician.

2. Remove opal lens being careful not to scratch the lens.
Do Not remove endcap.


Unscrew the LED plate and carefully disconnect the power

3. Connect the Power feed to the other fixture (white connector). Connect the dimming plug with yellow and blue wires. Join both fixtures together being careful not to pinch wires.

4. Attach LED Plate and fasten screws to fixture. Make certain there is minimal to no gap between the fixtures and that it looks seamless. Tighten the screws to the mounting bracket

5. Attach Opal lens to both fixture and reconnect the power to the entire lighting fixture.

Test light fixture. Note colour codes and colours of wires.

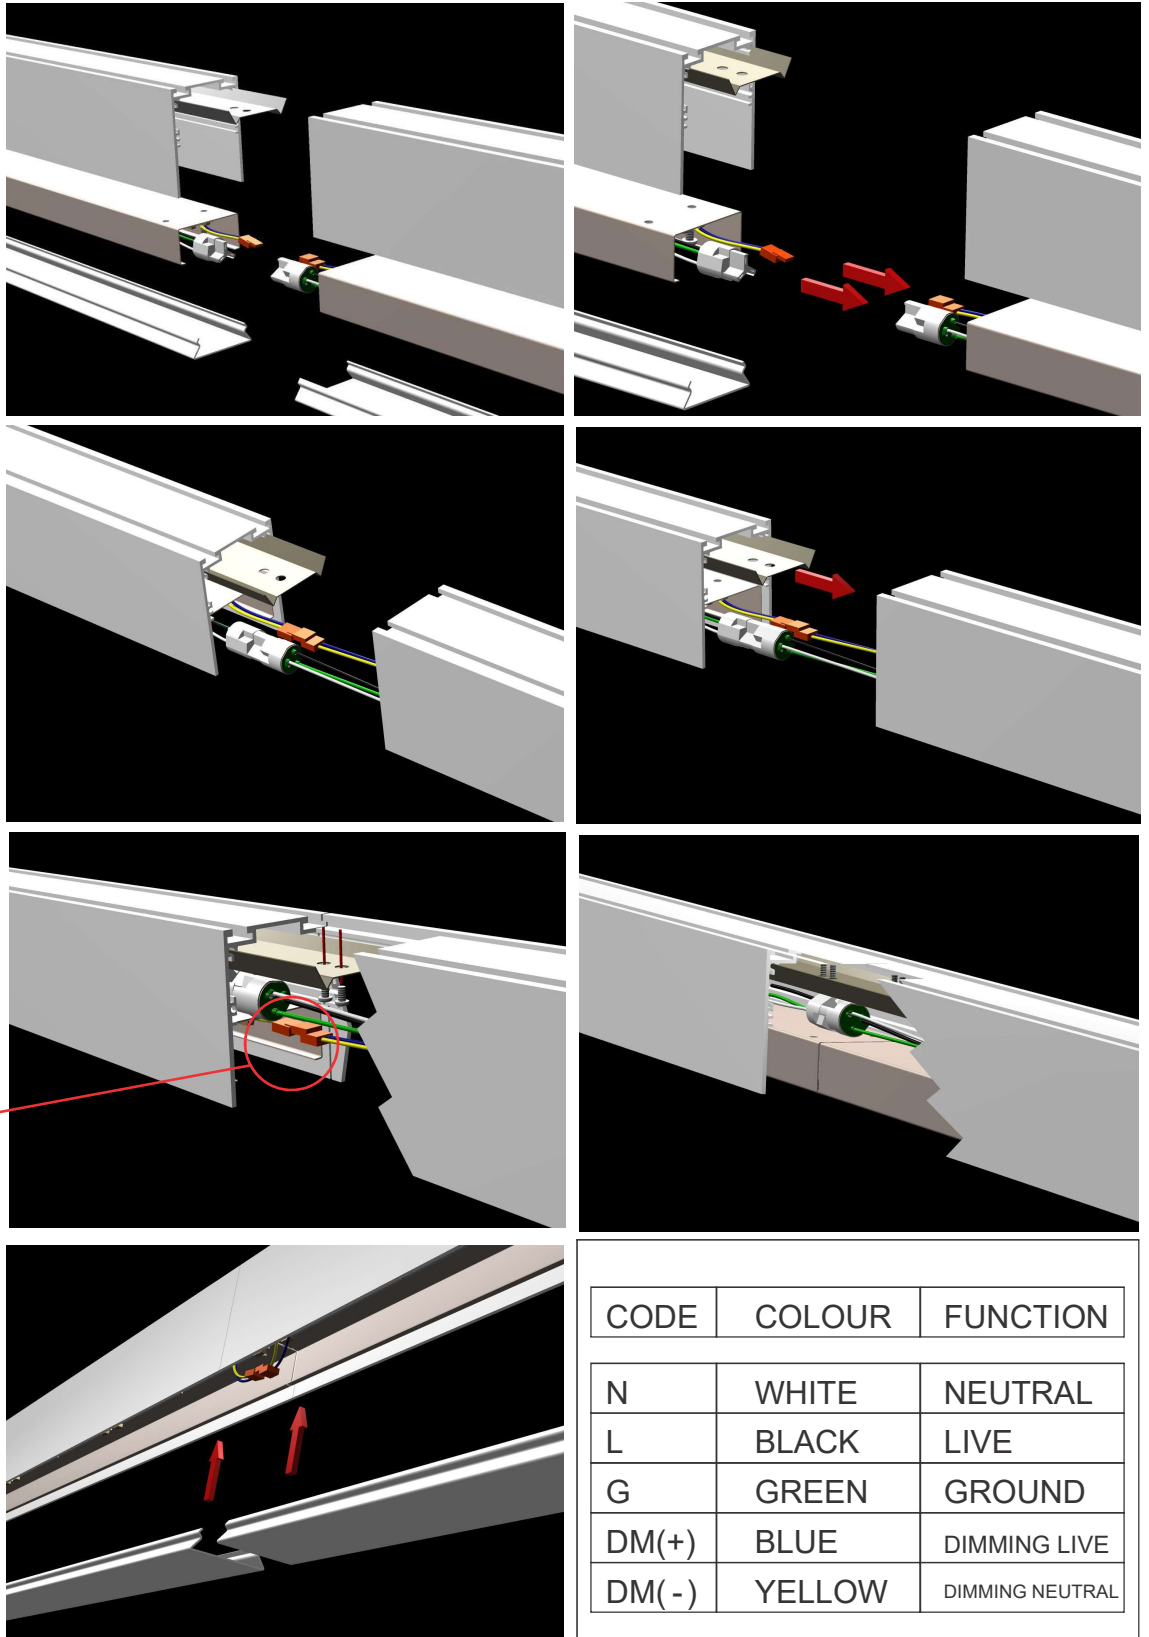

CODE	COLOUR	FUNCTION
N	WHITE	NEUTRAL
L	BLACK	LIVE
G	GREEN	GROUND
DM(+)	BLUE	DIMMING LIVE
DM(-)	YELLOW	DIMMING NEUTRAL