



## FEATURES:

- Architectural linear luminaire with direct lighting distribution.
- Light source: LED Strip or optional LED Tape.
- The diffuse illumination is provided by frosted opal lens.
- Available for row mounted application in various lengths.
- Suitable for suspended and surface mounted installations.
- Offered with integrated or remote driver.
- Extruded aluminum body is available in white or grey finish.
- LED's are rated for 60,000hrs. L70 with +85CRI.
- Standard suspension length is 96 Inches.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.



## SPECIFICATION: ED VECTOR0+

SIZE	SOURCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT
___Feet*	5W/Ft LED	120V	ST - Standard	SS - Suspended	OP - Opal	WH - White	30K - 3000Kelvin
	7W/Ft LED	277V	DL - 0.10V Dimming	SF - Surface		BK - Black	35K - 3500Kelvin
		347V**	DM - Dimming***			GR - Grey	40K - 4000Kelvin

- \* Enter required length of the luminaire.
- \*\* Not available for all configurations.
- \*\*\* Please specify dimming requirements.

## DIMENSIONS:

Height: 2 1/2"  
Width: 1 1/2"

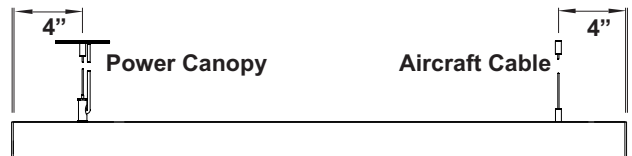

## LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	485 lm	500 lm	515 lm
7W	680 lm	700 lm	720 lm

Project:

Type:

## Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9  
Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302  
www.edisonlighting.ca info@edisonlighting.ca