



FEATURES:

- Architectural luminaire with direct/indirect lighting distribution.
- Light source: LED Tape.
- Side lit diffuser is made from high efficiency etched polycarbonate to achieve even lighting distribution.
- Aluminum body has white matt finish and integral LED driver.
- Suitable for suspended and row mounted installations.
- LED's are rated for 60,000hrs. L70 and +85CRI.
- Has a proven record in office, hospitality and commercial installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.


SPECIFICATION: ED AURA+

SOURCE	VOLTAGE	DRIVER	MOUNTING	FINISH	CCT
50W LED	120V 277V 347V*	ST - Standard DL - 0.10V Dimming DM - Dimming**	SS - Suspended	WH - White	30K - 3000Kelvin 35K - 3500Kelvin 40K - 4000Kelvin

- * Not available for all configurations.
 ** Please specify dimming requirements.

DIMENSIONS:

Length:	47 5/8"
Width:	11 7/8"
Height:	1 1/8"

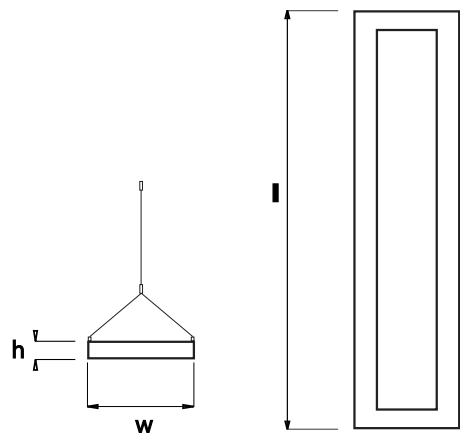

LUMEN OUTPUT:

Watts	30K	35K	40K
50W	4380 lm	4500 lm	4610 lm

Project:

Type:

Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302
 www.edisonlighting.ca info@edisonlighting.ca