



## FEATURES:

- Architectural luminaire with direct lighting distribution.
- Light source: LED Strip.
- Diffused illumination is provided by high efficiency opal insert or optional low glare microprismatic lens.
- Suitable for suspended and row mounted installations.
- Fixture body with integrated driver is made from light weight steel with white matt finish.
- LED Strips are rated for 60,000hrs. L70 and +85CRI.
- Has a proven record in office and commercial applications.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.

## SPECIFICATION: ED EDGE+

| SOURCE  | VOLTAGE | DRIVER             | MOUNTING       | LENS           | FINISH     | CCT              |
|---------|---------|--------------------|----------------|----------------|------------|------------------|
| 35W LED | 120V    | ST - Standard      | SS - Suspended | OP - Opal      | WH - White | 30K - 3000Kelvin |
| 45W LED | 277V    | DL - 0.10V Dimming |                | PR - Prismatic |            | 35K - 3500Kelvin |
|         | 347V*   | DM - Dimming**     |                |                |            | 40K - 4000Kelvin |


\* Not available for all configurations.  
 \*\* Please specify dimming requirements.

## DIMENSIONS:

Length: 47 1/4"  
 Width: 8 1/8"  
 Height: 1 3/4"

## LUMEN OUTPUT:

| Watts | 30K     | 35K     | 40K     |
|-------|---------|---------|---------|
| 35W   | 3420 lm | 3500 lm | 3580 lm |
| 45W   | 4400 lm | 4500 lm | 4600 lm |

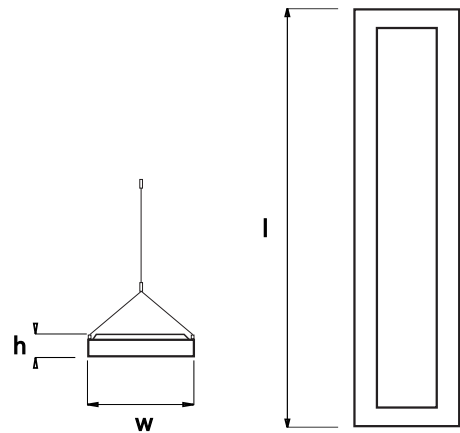

Project:

Type:

## Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9  
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302  
 www.edisonlighting.ca info@edisonlighting.ca