



FEATURES:

- Architectural luminaire with direct lighting distribution.
- Light source: COB LED.
- High efficiency aluminum optic has a built in glare reduction diffusor for LED spot.
- The body of the luminaire has white and black finish.
- Comes standard with air-craft suspension and remote driver.
- LED Spot is rated for 60,000hrs. L70 and +85CRI.
- Has a proven record in office, commercial and retail installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.


SPECIFICATION: ED MRP+

SOURCE	VOLTAGE	DRIVER	MOUNTING	FINISH	CCT
15W LED	120V	ST - Standard	SS - Suspended	WH - White	30K - 3000 Kelvin
20W LED	277V	DL - 0.10V Dimming			35K - 3500 Kelvin
	347V*	DM - Dimming**			40K - 4000 Kelvin

* Not available for all configurations.
 ** Please specify dimming requirements.

DIMENSIONS:

Width: 5 1/4"
 Height: 6 1/2"

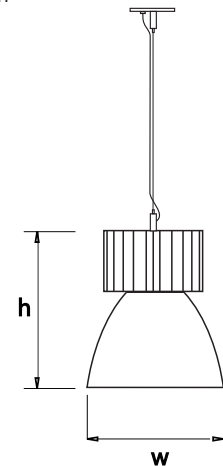

LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1465 lm	1500 lm	1535 lm
20W	1950 lm	2000 lm	2050 lm

Project:

Type:

Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302
 www.edisonlighting.ca info@edisonlighting.ca