

### FEATURES:

- Architectural luminaire with direct lighting distribution.
- Light source: LED Module.
- Unique Multioptic lens provide superior lighting distribution with Unified Glare Rating of <19URG.
- Ideal for computerized offices and educational institutions.
- Suitable for suspended installations with remote driver.
- Low profile steel body is available in white, black or grey finish.
- LED's are rated for 60,000hrs. L70 with +85CRI.
- Standard suspension length is 96 Inches.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.


### SPECIFICATION: ED RAYS+

SOURCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT
25W LED	120V	ST - Standard	SS - Suspended	OP - Opal	WH - White	30K - 3000Kelvin
35W LED	277V	DL - 0.10V Dimming			BK - Black	35K - 3500Kelvin
	347V*	DM - Dimming**			GR - Grey	40K - 4000Kelvin

\* Not available for all configurations.  
 \*\* Please specify dimming requirements.

### DIMENSIONS:

Length:	47 1/4"
Width:	3 1/2"
Height:	1/2"

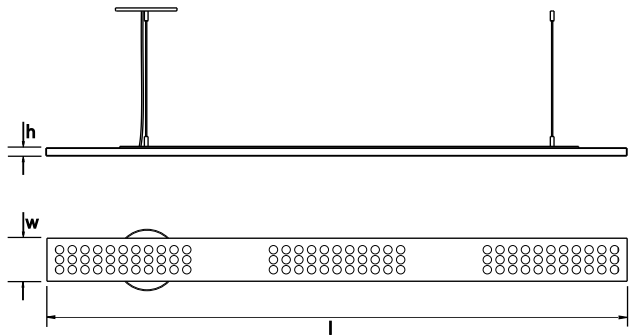

### LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
25W	2800lm	2875lm	2950lm
35W	3925lm	4025lm	4125lm

Project: \_\_\_\_\_

Type: \_\_\_\_\_