



## FEATURES:

- Architectural luminaire with direct lighting distribution.
- Light source: LED Strip.
- Diffused illumination is provided by high efficiency opal insert.
- Sleek body of the luminaire combines two aluminium sides with laser cut metal top enclosure.
- Suitable for suspended installations.
- Optional ceiling canopy is available for remote driver.
- LED Strips are rated for 60,000hrs. L70 and +85CRI.
- Has a proven record in office and commercial installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.


## SPECIFICATION: ED RING+

SIZE	SOURCE	VOLTAGE	DRIVER	MOUNTING	FINISH	CCT
Ø 24"	25W LED	120V	ST - Standard	SS - Suspended	WH - White	30K - 3000Kelvin
Ø 36"	50W LED	277V	DL - 0.10V Dimming		GR - Grey	35K - 3500Kelvin
Ø 48"	75W LED*	347V**	DM - Dimming***		BK - Black	40K - 4000Kelvin
Ø 60"						

- \* Not available for 24" size.
- \*\* Not available for all configurations.
- \*\*\* Please specify dimming requirements.

## DIMENSIONS:

Width: 2 3/4"  
 Height: 2 1/2"  
 Diameter: 24" / 36" / 48" / 60"

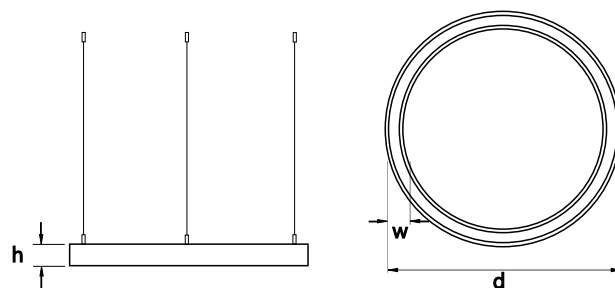

## LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5120 lm	5250 lm	5380 lm
75W	7670 lm	7870 lm	8070 lm

Project:

Type:

## Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9  
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302  
 www.edisonlighting.ca info@edisonlighting.ca