



FEATURES:

- Architectural luminaire with direct/indirect lighting distribution.
- Light source: COB LED.
- Diffused illumination is provided by high efficiency opal insert or optional low glare microprismatic lens.
- Suitable for non-insulated recessed installations in to T-bar or drywall.
- Fixture body is made from light weight steel in white finish.
- LED Spot is rated for 60,000hrs. L70 and +85CRI.
- Has a proven record in office, commercial and retail applications.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.


SPECIFICATION: ED CORE+

SOURCE	VOLTAGE	DRIVER	MOUNTING	LENS	CCT
25W LED	120V	ST - Standard	RS- Recessed	OP - Opal	30K - 3000Kelvin
45W LED	277V	DL - 0.10V Dimming	DR - Drywall	PR - Prismatic	35K - 3500Kelvin
	347V*	DM - Dimming**			40K - 4000Kelvin

* Not available for all configurations.
 ** Please specify dimming requirements.

DIMENSIONS:

Length: 23 3/4"
 Width: 23 3/4"
 Depth: 4 5/8"

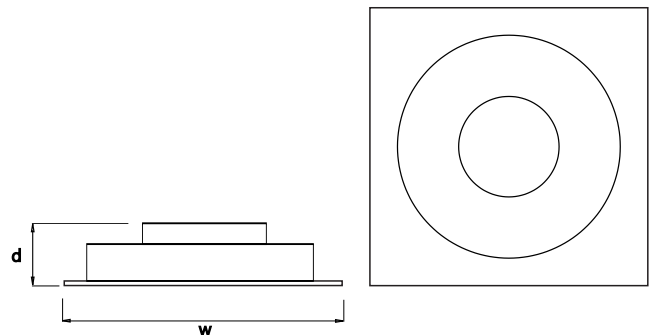

LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2350 lm	2400 lm	2450 lm
45W	4300 lm	4400 lm	4500 lm

Project:

Type:

Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302
 www.edisonlighting.ca info@edisonlighting.ca