



FEATURES:

- Architectural luminaire with direct lighting distribution.
- Light source: LED Strip.
- Diffused illumination is provided by high efficiency opal insert or optional low glare microprismatic lens.
- Suitable for non-insulated recessed installations in to T-bar or drywall.
- Fixture body is made from light weight steel in white finish.
- LED Strips are rated for 60,000hrs. L70 and +85CRI.
- Has a proven record in office, commercial and retail applications.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.




SPECIFICATION: ED CUBE+

SOURCE	VOLTAGE	DRIVER	MOUNTING	LENS	CCT
35W LED	120V	ST - Standard	RS - Recessed	OP - Opal	30K - 3000Kelvin
45W LED	277V	DL - 0.10V Dimming	DR - Drywall	PR - Prismatic	35K - 3500Kelvin
	347V*	DM - Dimming**			40K - 4000Kelvin

* Not available for all configurations.
 ** Please specify dimming requirements.

DIMENSIONS:

Length: 23 3/4"
 Width: 23 3/4"
 Depth: 1 5/8"

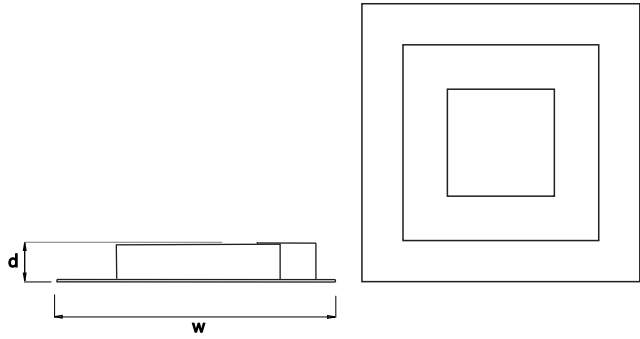

LUMEN OUTPUT:

Watts	30K	35K	40K
35W	3420 lm	3500 lm	3580 lm
45W	4400 lm	4500 lm	4600 lm

Project: _____
 Type: _____