



## FEATURES:

- Architectural LED panel with soft direct lighting distribution.
- Light source: LED Tape.
- PMMA acrylic diffusor is sealed in to the ultra slim extruded aluminum frame in white finish.
- Suitable for non insulated recessed installations in to T-bar or drywall.
- Option of integrated or remote driver.
- LED's are rated for 60,000hrs. L70 and +85CRI.
- Has a proven record in office, commercial and retail applications.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.


## SPECIFICATION: ED SKY+

SOURCE	VOLTAGE	DRIVER	MOUNTING	CCT
30W LED	120V	ST - Standard	RS - Recessed	30K - 3000Kelvin
40W LED	277V	DL - 0.10V Dimming	DR - Drywall	35K - 3500Kelvin
	347V*	DM - Dimming**		40K - 4000Kelvin

\* Not available for all configurations.  
 \*\* Please specify dimming requirements.

## DIMENSIONS:

Length: 23 3/4"  
 Width: 23 3/4"  
 Depth: 1 1/2"

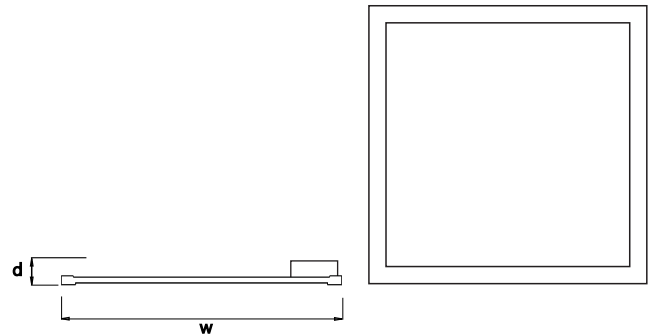

## LUMEN OUTPUT:

Watts	30K	35K	40K
30W	3020 lm	3100 lm	3180 lm
40W	4000 lm	4100 lm	4200 lm

Project:

Type:

## Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9  
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302  
 www.edisonlighting.ca info@edisonlighting.ca