



## FEATURES:

- Architectural luminaire with direct/indirect lighting distribution.
- Light source: COB LED.
- Extremely durable round diffuser is made from frosted PMMA polycarbonate for even lighting distribution.
- Steel body is available with white or black finish.
- Suitable for surface or wall mounted installations.
- LED Spot is rated for 60,000hrs. L70 and +85CRI.
- Has a proven record in office and high traffic commercial installations.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.


## SPECIFICATION: ED COR+

| SOURCE  | VOLTAGE | DRIVER             | MOUNTING     | FINISH     | CCT              |
|---------|---------|--------------------|--------------|------------|------------------|
| 15W LED | 120V    | ST - Standard      | SF - Surface | WH - White | 30K - 3000Kelvin |
| 20W LED | 277V    | DL - 0.10V Dimming |              | BK - Black | 35K - 3500Kelvin |
| 30W LED | 347V*   | DM - Dimming**     |              |            | 40K - 4000Kelvin |

\* Not available for all configurations.  
 \*\* Please specify dimming requirements.

## DIMENSIONS:

Width: 11 1/2"  
 Height: 2 3/8"

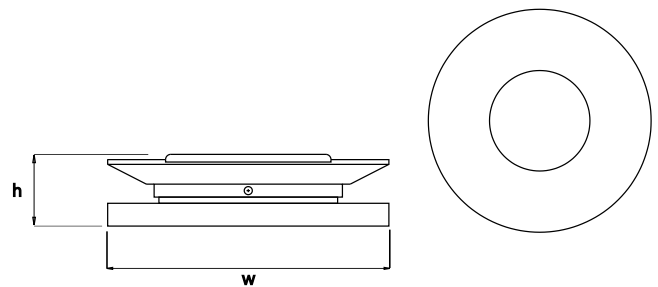

## LUMEN OUTPUT:

| Watts | 30K     | 35K     | 40K     |
|-------|---------|---------|---------|
| 15W   | 1360 lm | 1400 lm | 1440 lm |
| 20W   | 1850 lm | 1900 lm | 1950 lm |
| 30W   | 2800 lm | 2900 lm | 3000 lm |

Project:

Type:

## Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9  
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302  
 www.edisonlighting.ca info@edisonlighting.ca