



FEATURES:

- Architectural luminaire with direct lighting distribution.
- Light source: LED Strip.
- Diffused illumination is provided by high efficiency opal insert or optional low glare microprismatic lens.
- Suitable for surface mounted installations.
- Fixture body is made from light weight steel with white matt finish.
- LED Strips are rated for 60,000hrs. L70 and +85CRI.
- Has a proven record in office and commercial applications.
- Custom modifications are available.
- ED luminaires are certified to CSA and UL standards.


SPECIFICATION: ED EDGE+

SOURCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT
35W LED	120V	ST - Standard	SF - Surface	OP - Opal	WH - White	30K - 3000Kelvin
45W LED	277V	DL - 0.10V Dimming		PR - Prismatic		35K - 3500Kelvin
	347V*	DM - Dimming**				40K - 4000Kelvin

* Not available for all configurations.
 ** Please specify dimming requirements.

DIMENSIONS:

Length: 47 1/4"
 Width: 8 1/8"
 Depth: 1 7/8"

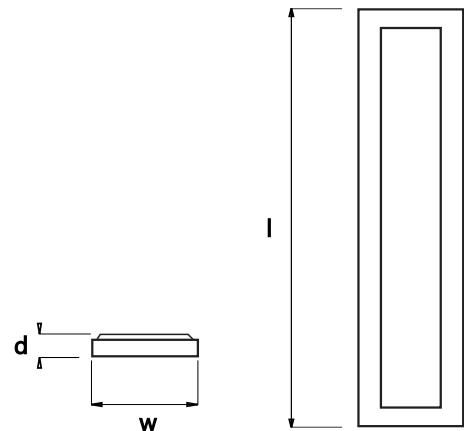

LUMEN OUTPUT:

Watts	30K	35K	40K
35W	3420 lm	3500 lm	3580 lm
45W	4400 lm	4500 lm	4600 lm

Project:

Type:

Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302
 www.edisonlighting.ca info@edisonlighting.ca