



## FEATURES:

- Architectural luminaire with direct/indirect lighting distribution.
- Light source: LED Strip.
- Dual diffuser is made from frosted opal polycarbonate.
- LED strip produces even 50/50 light distribution.
- Combination of aluminum and steel body with integrated driver comes in matt white finish.
- Suitable for wall or surface mounted installations.
- LED Strip is rated for 60,000hrs. L70% and +85CRI.
- Has a proven record in office, hospitality and commercial installations.
- ED luminaires are certified to CSA and UL standards.


## SPECIFICATION: ED VLW+

SOURCE	VOLTAGE	DRIVER	MOUNTING	FINISH	CCT
10W LED	120V	ST - Standard	SF - Surface	WH - White	30K - 3000 Kelvin
20W LED	277V	DL - 0.10V Dimming			35K - 3500 Kelvin
	347V*	DM - Dimming**			40K - 4000 Kelvin

\* Not available for all configurations.  
 \*\* Please specify dimming requirements.

## DIMENSIONS:

Width: 3 9/16"  
 Depth: 3 9/16"  
 Length: 23 5/8"

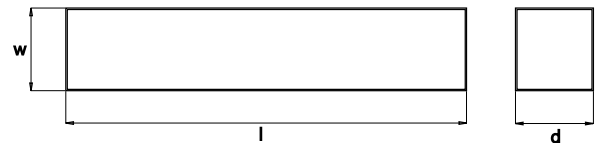

## LUMEN OUTPUT:

Watts	30K	35K	40K
10W	975 lm	1000 lm	1025 lm
20W	1950 lm	2000 lm	2050 lm

Project:

Type:

## Edison Lighting Group Ltd.

1303 Ringwell Dr. Unit #2, Newmarket, ON L3Y 8T9  
 Tel: 905-830-0339 or 1-800-667-9281 Fax: 905-898-6439 or 1-800-667-9302  
 www.edisonlighting.ca info@edisonlighting.ca