



**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: LED Tape.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of luminaire is made from curved aluminum profile.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Remote driver enclosure can be surface mounted or installed in a ceiling cavity. Standard enclosure size: 1.60"H x 3.75"W x 18.5"L.
- ✓ LED tape is rated for 60,000hrs. L80 with 90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED ORBIT+**  —  —  —  —  —  —  —  —  —  —  —

Enter the Product Code into the boxes above.

- |                                    |  |   |  |   |   |
|------------------------------------|--|---|--|---|---|
| <b>TYPE</b>                        | <b>SIZE</b>  | <b>SOURCE</b>   | <b>RADIANCE</b>  | <b>VOLTAGE</b>  | <b>DRIVER</b>   |
| <input type="checkbox"/> S - Shape | <input type="checkbox"/> 3 Feet<br><input type="checkbox"/> 4 Feet<br><input type="checkbox"/> 6 Feet<br><input type="checkbox"/> 8 Feet | <input type="checkbox"/> 5W/FT LED<br><input type="checkbox"/> 7W/FT LED<br><input type="checkbox"/> 10W/FT LED | <input type="checkbox"/> DD - Direct (100% Downward)<br><input type="checkbox"/> SD - Side Distribution (100% Sideways)<br><small>*Light Distribution.</small> | <input type="checkbox"/> 120V<br><input type="checkbox"/> 277V<br><input type="checkbox"/> 347V*<br><small>*Not available for all configurations.</small> | <input type="checkbox"/> ST - Standard (Non-Dimming)<br><input type="checkbox"/> DL - 0-10V Dimming (1%)<br><input type="checkbox"/> DA - DALI<br><input type="checkbox"/> WZ - Wiz**<br><input type="checkbox"/> <input type="text"/> *<br><small>* Please specify dimming method (ELV).<br/>**Remote driver only.</small> |

- |   |                                    |  |  |  |
|---|------------------------------------|--|--|--|
| <b>MOUNTING</b>   | <b>LENS</b>                        | <b>FINISH</b>  | <b>CCT</b>   | <b>OPTIONS</b>                           |
| <input type="checkbox"/> S4-Suspension 4Feet**<br><input type="checkbox"/> S6-Suspension 6Feet**<br><input type="checkbox"/> S <input type="text"/> Feet*<br><small>*Please specify required Length.<br/>**Remote Driver.</small> | <input type="checkbox"/> OP - Opal | <input type="checkbox"/> WH - White<br><input type="checkbox"/> BK - Black<br><input type="checkbox"/> GR - Grey<br><input type="checkbox"/> CF - Custom <input type="text"/> RAL# | <input type="checkbox"/> 30K/90CRI - 3000Kelvin<br><input type="checkbox"/> 35K/90CRI - 3500Kelvin<br><input type="checkbox"/> 40K/90CRI - 4000Kelvin<br><input type="checkbox"/> RGBW<br><small>*Other options are available.</small> | <input type="checkbox"/> CB - Casambi BT |

**LUMEN OUTPUT W/FT:**


Watts	30K	35K	40K
5W	440 lm	450 lm	460 lm
7W	618 lm	630 lm	642 lm
10W	882 lm	900 lm	918 lm




Project:

Type:

**PROFILE:**

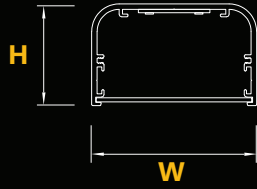


**3 Feet and 4 Feet**

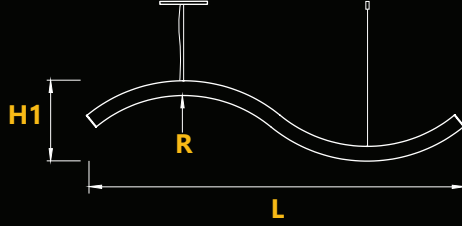


**DIMENSIONS:**

Profile	Size	Length	Height - H1	Radius - R
Width - W	3 Feet	37.03 Inch	7.87 Inch	15 Inch
2.36 Inch	4 Feet	46.75 Inch	6.00 Inch	30 Inch
Height - H	6 Feet	73.00 Inch	7.87 Inch	15 Inch
1.45 Inch	8 Feet	92.75 Inch	6.00 Inch	30 Inch


**6 Feet and 8 Feet**

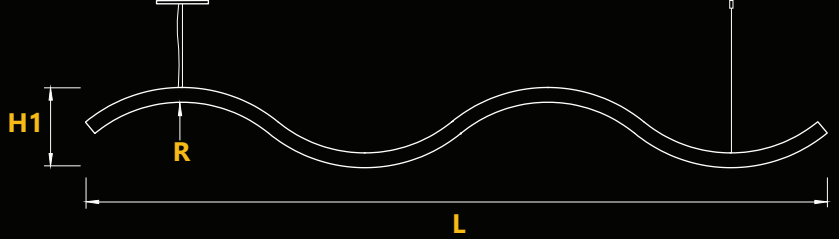


**SIZES AND CONFIGURATIONS:**




3 Feet




4 Feet




6 Feet

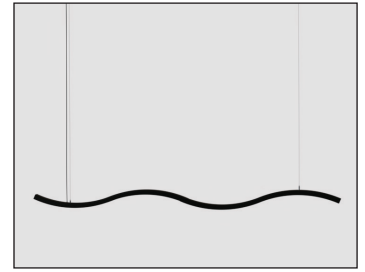


8 Feet

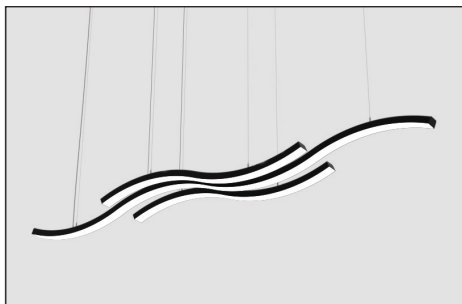

4 Feet and 8 Feet - Combination

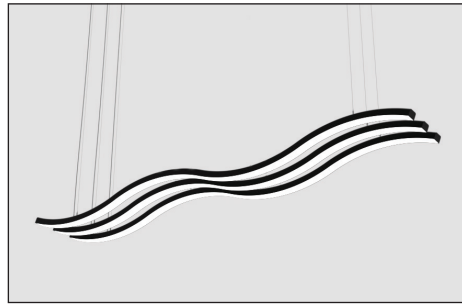

8 Feet - Combination

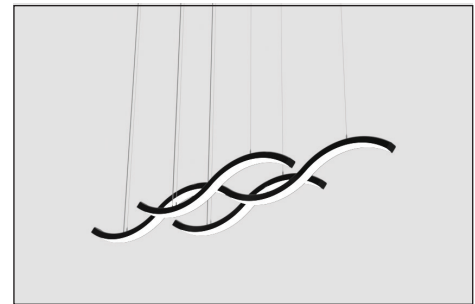

3 Feet and 6 Feet - Combination