
**FEATURES:**

- ✓ Architectural linear luminaire with Direct or Direct/Indirect distribution.
- ✓ Light source: 11" LED Modular Board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Regular 50°/10UGR, Flood 80°/15UGR or Asymmetric beam angle.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for Surface, Suspended, Recessed and Wall Mount installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with custom color options.
- ✓ LED's are rated for 60,000hrs. L80 with +90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

**reinventlight**
**SPECIFICATION:**

**ED VECTOR+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

- |   |   |  |   |   |  |
|---|---|--|---|---|--|
| <b>TYPE</b><br><input type="checkbox"/> DO - Dark Optic | <b>SIZE</b><br><input type="text"/> Feet*<br><small>* 1 Foot increments only.</small> | <b>SOURCE</b><br><input type="checkbox"/> 5W/Ft LED<br><input type="checkbox"/> 7W/Ft LED<br><input type="checkbox"/> 10W/Ft LED | <b>RADIANCE</b><br><input type="checkbox"/> DD - Direct (100%Down)<br><input type="checkbox"/> UD - Uneven (70%Down/30%Up)**<br><small>*Light distribution.<br/>**Available for Surface/Wall Mount configurations only.</small> | <b>VOLTAGE</b><br><input type="checkbox"/> 120V<br><input type="checkbox"/> 277V<br><input type="checkbox"/> 347V*<br><small>*Not available for all configurations.</small> | <b>DRIVER</b><br><input type="checkbox"/> ST - Standard (Non-Dimming)<br><input type="checkbox"/> DL - 0-10V Dimming (1%)<br><input type="checkbox"/> DA - DALI<br><input type="checkbox"/> BT - Bluetooth<br><input type="checkbox"/> <input type="text"/> *<br><input type="checkbox"/> EC - Emergency Circuit<br><input type="checkbox"/> EM - Emergency**<br><small>*Please specify dimming method.<br/>**Battery Pack per 4 foot section.</small> |
|---|---|--|---|---|--|

- |   |   |   |   |   |  |
|---|---|---|---|---|--|
| <b>MOUNTING</b><br><input type="checkbox"/> S4 - Suspension 4 Feet<br><input type="checkbox"/> S6 - Suspension 6 Feet<br><input type="checkbox"/> S <input type="text"/> Feet*<br><input type="checkbox"/> WM - Wall Mount<br><input type="checkbox"/> WF - Wall Flush<br><input type="checkbox"/> SF - Surface Mount<br><input type="checkbox"/> RT - Recessed Trimless<br><small>*Please specify required length.</small> | <b>REFLECTOR</b><br><b>Square:</b><br><input type="checkbox"/> S/BK - Black<br><input type="checkbox"/> S/WH - White<br><input type="checkbox"/> S/RD - Red<br><input type="checkbox"/> S/SL - Silver<br><input type="checkbox"/> S/GD - Gold<br><input type="checkbox"/> S/GM - Gunmetal<br><b>Round:</b><br><input type="checkbox"/> R/BK - Black<br><input type="checkbox"/> R/WH - White<br><input type="checkbox"/> R/RD - Red<br><input type="checkbox"/> R/SL - Silver<br><input type="checkbox"/> R/GD - Gold<br><input type="checkbox"/> R/GM - Gunmetal | <b>LENS</b><br><input type="checkbox"/> RB - Regular 50°<br><input type="checkbox"/> FB - Flood 80°<br><input type="checkbox"/> AB - Asymmetric | <b>FINISH</b><br><input type="checkbox"/> BK - Black<br><input type="checkbox"/> WH - White<br><input type="checkbox"/> CF - Custom <input type="text"/> RAL# | <b>CCT</b><br><input type="checkbox"/> 30K/90CRI - 3000Kelvin<br><input type="checkbox"/> 35K/90CRI - 3500Kelvin<br><input type="checkbox"/> 40K/90CRI - 4000Kelvin | <b>OPTIONS</b><br><input type="checkbox"/> No Options*<br><input type="checkbox"/> DC - Dual Circuit**<br><small>*Leave empty.<br/>**Down/Up control separately.</small> |
|---|---|---|---|---|--|


**LUMEN OUTPUT W/Ft:**

Watts	30K	35K	40K
5W	610 lm	625 lm	640 lm
7W	855 lm	875 lm	895 lm
10W	1225lm	1250 lm	1275 lm

Project:

Type:

## SIZE:

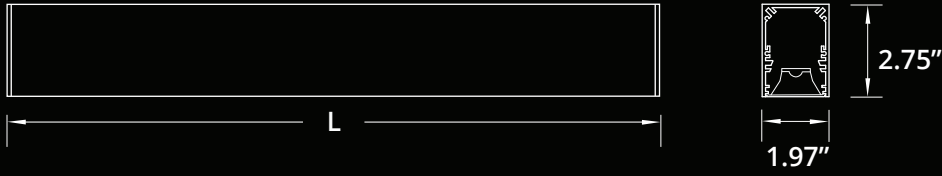

Size	L (LENGTH)	LED Strips
1 Feet	11.32 Inch	1 x 11"
2 Feet	22.30 Inch	2 x 11"
3 Feet	33.29 Inch	3 x 11"
4 Feet	48.00 Inch	4 x 11"
5 Feet	60.00 Inch	5 x 11"
6 Feet	72.00 Inch	6 x 11"
7 Feet	84.00 Inch	7 x 11"
8 Feet	96.00 Inch	8 x 11"

## RADIANCE:


### DIRECT DISTRIBUTION




### UNEVEN DISTRIBUTION




## MOUNTING:

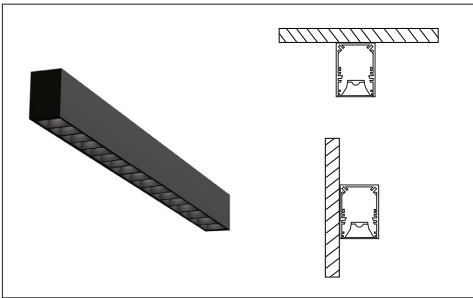

SURFACE MOUNT, WALL FLUSH

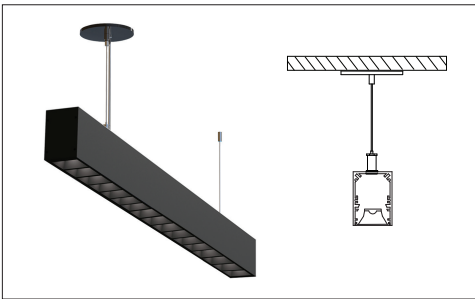

SUSPENDED

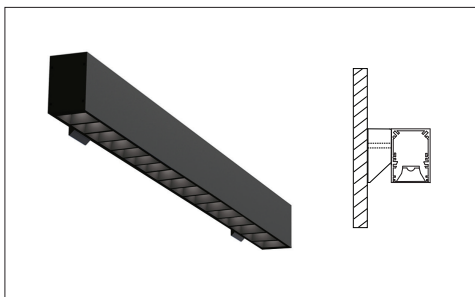

WALL MOUNT

## REFLECTORS:

### SQUARE:



WHITE



SILVER



BLACK



GOLD



RED




GUNMETAL


### ROUND:




## BEAM:



REGULAR BEAM



FLOOD BEAM



ASYMMETRIC BEAM