
FEATURES:

- ✓ Architectural luminaire with direct or indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:
ED TRIAD+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>

Enter the Product Code into the boxes above.

SIZE

- 2x2x2 Feet
- 3x3x3 Feet
- 4x4x4 Feet
- *

 * Specify required length.
 ** Custom angles are available.

SOURCE

- 25WLED
- 50WLED
- 75WLED*

* Available for 3 & 4 Feet.

RADIANCE

- DD - Direct (100%Down)
- ID - Indirect (100%Up)**

 *Light Distribution.
 **Suspended Configuration only.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- *

* Please specify dimming method.

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- WM - Wall Mount
- SF - Surface Mount
- RT - Recessed Trimless

*Please specify required Length.

LENS

- OP - Opal

FINISH

- BK - Black
- WH - White
- CF - Custom RAL#

CCT

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- TW - Tunable White**
(2700K-6500K)

 *Other options are available.
 **Available with Dali controls.

OPTIONS

- No Options*
- DS-Daylight Sensor
- DC - Dual Circuit**
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

 *Leave Empty.
 **Down /Up Control separately.

LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm





Declare.

Project:

Type:

SIZE:

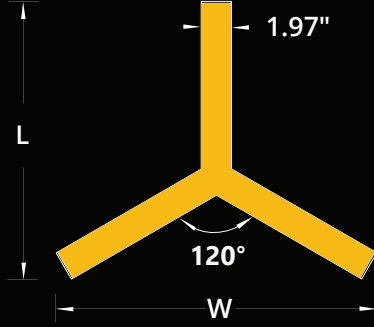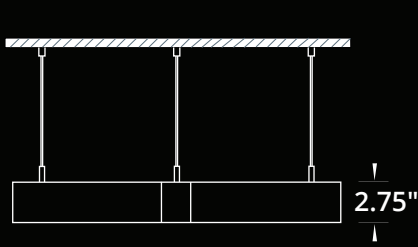

Size	L x W
2x2x2 Feet	34.706 x 40.056 Inch
3x3x3 Feet	51.206 x 59.105 Inch
4x4x4 Feet	67.706 x 78.154 Inch

RADIANCE:


DIRECT DISTRIBUTION




INDIRECT DISTRIBUTION



MOUNTING:

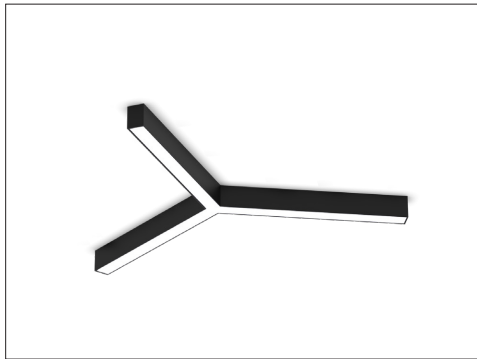


SURFACE MOUNT

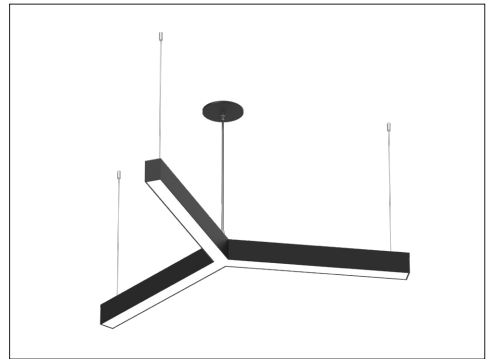

SUSPENDED



WALL MOUNT

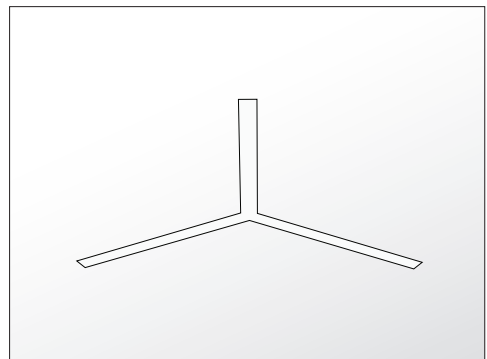

RECESSED TRIMLESS