
FEATURES:

- ✓ Architectural Y-shaped luminaire with direct lighting distribution.
- ✓ Light source: LED board 11".
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Regular 50°/10UGR or Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:
ED TRIAD+
 - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

-
- DO - Dark Optic

SIZE

-
- 2x2x2 Feet
-
-
- 3x3x3 Feet
-
-
- 4x4x4 Feet
-
-
-
- *
-
- * Specify required length.

SOURCE

-
- 25WLED
-
-
- 50WLED
-
-
- 75WLED*
-
- * Available for 3 & 4 Feet.

RADIANCE

-
- DD - Direct (100%Down)
-
- *Light Distribution.

VOLTAGE

-
- 120V
-
-
- 277V
-
-
- 347V*
-
- *Not available for all configurations.

DRIVER

-
- ST - Standard (Non-Dimming)
-
-
- DL - 0-10V Dimming (1%)
-
-
- DA - DALI
-
-
-
- *
-
- * Please specify dimming method.

MOUNTING

-
- S4-Suspension 4Feet
-
-
- S6-Suspension 6Feet
-
-
- S
-
- Feet*
-
-
- SF - Surface Mount
-
-
- RT - Recessed Trimless
-
- *Please specify required Length.

REFLECTOR

-
- BK - Black
-
-
- WH - White
-
-
- SL - Silver

LENS

-
- RB - Regular 50°
-
-
- FB - Flood 80°

FINISH

-
- BK - Black
-
-
- WH - White
-
-
- CF - Custom
-
- RAL#

CCT

-
- 30K/90CRI - 3000Kelvin
-
-
- 35K/90CRI - 3500Kelvin
-
-
- 40K/90CRI - 4000Kelvin

LUMEN OUTPUT:



| Watts | 30K | 35K | 40K |
|-------|---------|---------|---------|
| 25W | 3570 lm | 3660 lm | 3750 lm |
| 50W | 5800 lm | 5950 lm | 6100 lm |
| 75W | 8825 lm | 9025 lm | 9225 lm |



Project:

Type:

SIZE:

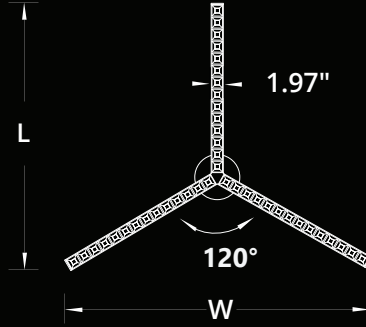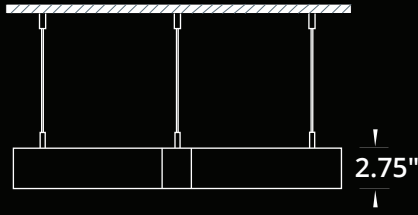

| Size | L x W |
|------------|----------------------|
| 2x2x2 Feet | 34.970 x 40.380 Inch |
| 3x3x3 Feet | 51.460 x 59.420 Inch |
| 4x4x4 Feet | 67.940 x 78.460 Inch |

RADIANCE:


DIRECT DISTRIBUTION



MOUNTING:



SURFACE MOUNT

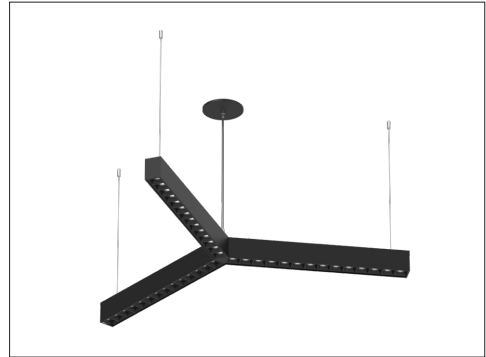

SUSPENDED



WALL MOUNT



RECESSED TRIMLESS