


**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency low glare integral reflector comes in following beam angles: Spot 15°, Narrow Flood 35° and Flood 55°.
- ✓ Adjustable trim assembly can be tilted up to 30° for wall wash applications.
- ✓ Available with optional flat frame plate for NC installations.
- ✓ Suitable for recessed non insulated ceilings and dry locations.
- ✓ LED spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**



**SIZE**

- 1x-Single

**SOURCE**

- 15W LED
- 20W LED
- 25W LED

**RADIANCE**

- DD - Direct (100%Down)  
\*Light Distribution.

**VOLTAGE**

- 120V
  - 277V
  - 347V\*
- \*Not available for all configurations.

**DRIVER**

- ST - Standard (Non-Dimming)
  - DL - 0-10V Dimming (1%)
  - DA - DALI
  - \*
- \*Please specify dimming method.

**MOUNTING**

- RT -Retrofit
- NC- New Const. Plate

**REFLECTOR**

- SP - Spot
- NF - Narrow Flood
- FL - Flood

**LOUVER**

- MW - Matt White
- MB - Matt Black
- MS - Matt Silver

**TRIM**


- WH - White
- BK- Black
- GR - Grey

**CCT**

- 30K/90CRI - 3000Kelvin
  - 35K/90CRI - 3500Kelvin
  - 40K/90CRI - 4000Kelvin
- \*Other options are available.

**DIMENSIONS:**

Size	Height	Width	Length	Cut Out
Single	4.88"	4.13"	4.13"	3.815"x3.815"

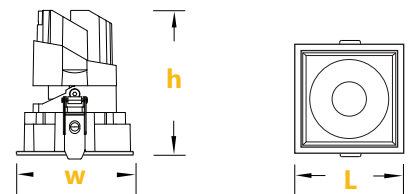

**LUMEN OUTPUT:**

Watts	30K	35K	40K
15W	1425 lm	1455 lm	1485 lm
20W	1900 lm	1940 lm	1980 lm
25W	2375 lm	2425 lm	2475 lm



Project:

Type: