

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: BIOS SkyBlue LED board (5.5"/11"/22").
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 50,000hrs. L80 with +90 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VERTEX+ - - - - - - - - - -

Enter the Product Code into the boxes above.

- SIZE**
- 2x2 Feet
 - 3x3 Feet
 - 4x4 Feet
 - *
- SOURCE**
- 25WLED
 - 50WLED
 - 75WLED*
- * Available for 3 & 4 Feet.
- RADIANCE**
- DD - Direct (100%Down)
 - ID - Indirect (100%Up)**
- *Light Distribution.
**Suspended Configuration only.
- VOLTAGE**
- 120V
 - 277V
 - 347V*
- *Not available for all configurations.
- DRIVER**
- ST - Standard
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - *
- *Please specify dimming method.

*Specify required length.
** Custom angles are available.

- MOUNTING**
- S4-Suspension 4Feet
 - S6-Suspension 6Feet
 - S Feet*
 - WM - Wall Mount
 - SF - Surface Mount
 - RT - Recessed Trimless
- *Please specify required Length.
- LENS**
- OP - Opal
- FINISH**
- WH - White
 - BK - Black
 - GR - Grey
 - CF - Custom RAL#
 - VD - Vinyl Decal*
- * Please provide 600dpi image.
- CCT**
- 30K/90CRI - 3000Kelvin
 - 35K/90CRI - 3500Kelvin
 - 40K/90CRI - 4000Kelvin
 - TW - Tunable White** (2700K-5600K)
- *Other options are available.
**Available with Dali controls.
- OPTIONS**
- No Options*
 - DS - Daylight Sensor
 - DC - Dual Circuit**
 - OS - Occupancy Sensor
 - DOS - Daylight & Occupancy Sensor
- *Leave Empty.
**Down /Up Control separately.

LUMEN OUTPUT:


Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm



Project:

Type:

SIZE:

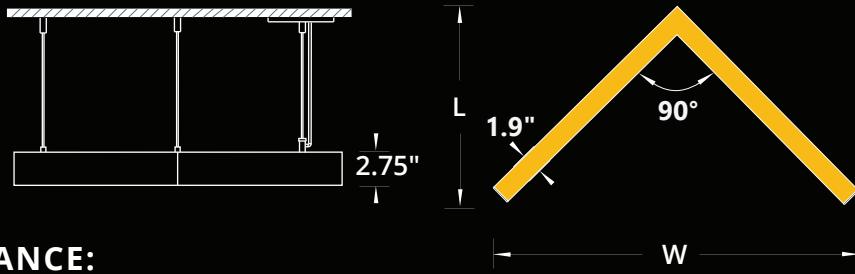

Size	LxW
2x2 Feet	18.00x33.40 Inch
3x3 Feet	25.80x48.97 Inch
4x4 Feet	33.57x64.54 Inch

RADIANCE:

DIRECT DISTRIBUTION




↓ 100%

INDIRECT DISTRIBUTION




↑ 100%


MOUNTING:

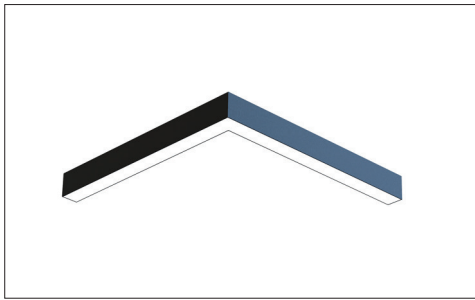


SURFACE MOUNT

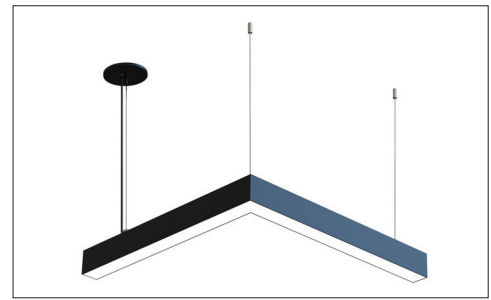

SUSPENDED

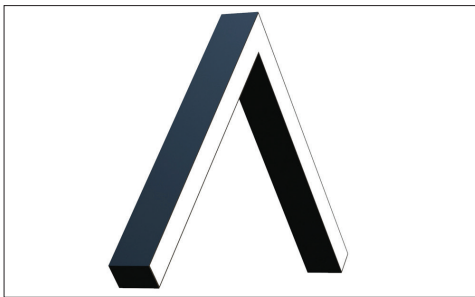

WALL MOUNT

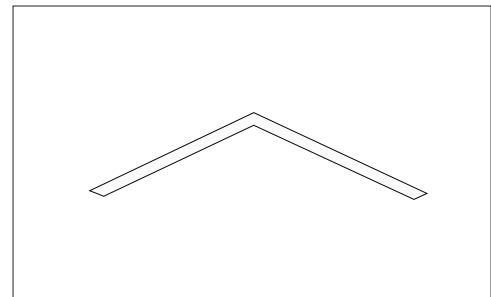

RECESSED TRIMLESS