

**FEATURES:**

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board 11".
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with Regular 50°/10UGR or Flood 80°/15UGR internal optic.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED SQUARE+**  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

- |  |   |   |  |   |  |
|--|---|---|--|---|--|
| <p><b>TYPE</b></p> <p><input type="checkbox"/> DO - Dark Optic</p> | <p><b>SIZE</b></p> <p><input type="checkbox"/> 2x2 Feet</p> <p><input type="checkbox"/> 3x3 Feet</p> <p><input type="checkbox"/> 4x4 Feet</p> <p><input type="checkbox"/> <input type="text"/>*</p> <p>* Specify required length.</p> | <p><b>SOURCE</b></p> <p><input type="checkbox"/> 25WLED</p> <p><input type="checkbox"/> 50WLED</p> <p><input type="checkbox"/> 75WLED*</p> <p>* Available for 3 &amp; 4 Feet.</p> | <p><b>RADIANCE</b></p> <p><input type="checkbox"/> DD - Direct (100%Down)</p> <p><input type="checkbox"/> UD - Uneven(70%Down/30%Up)**</p> <p>*Light Distribution.<br/>**Suspended Configuration only.</p> | <p><b>VOLTAGE</b></p> <p><input type="checkbox"/> 120V</p> <p><input type="checkbox"/> 277V</p> <p><input type="checkbox"/> 347V*</p> <p>*Not available for all configurations.</p> | <p><b>DRIVER</b></p> <p><input type="checkbox"/> ST - Standard (Non-Dimming)</p> <p><input type="checkbox"/> DL - 0-10V Dimming (1%)</p> <p><input type="checkbox"/> DA - DALI</p> <p><input type="checkbox"/> <input type="text"/>*</p> <p>* Please specify dimming method.</p> |
|--|---|---|--|---|--|

- |   |   |  |  |  |
|---|---|--|--|--|
| <p><b>MOUNTING</b></p> <p><input type="checkbox"/> S4-Suspension 4Feet</p> <p><input type="checkbox"/> S6-Suspension 6Feet</p> <p><input type="checkbox"/> S <input type="text"/> Feet*</p> <p><input type="checkbox"/> SF - Surface Mount</p> <p><input type="checkbox"/> RT - Recessed Trimless</p> <p>*Please specify required Length.</p> | <p><b>REFLECTOR</b></p> <p><input type="checkbox"/> WH - White</p> <p><input type="checkbox"/> BK - Black</p> <p><input type="checkbox"/> SL - Silver</p> | <p><b>LENS</b></p> <p><input type="checkbox"/> RB - Regular 50°</p> <p><input type="checkbox"/> FB - Flood 80°</p> | <p><b>FINISH</b></p> <p><input type="checkbox"/> WH - White</p> <p><input type="checkbox"/> BK - Black</p> <p><input type="checkbox"/> GR - Grey</p> <p><input type="checkbox"/> CF - Custom <input type="text"/> RAL#</p> | <p><b>CCT</b></p> <p><input type="checkbox"/> 30K/90CRI - 3000Kelvin</p> <p><input type="checkbox"/> 35K/90CRI - 3500Kelvin</p> <p><input type="checkbox"/> 40K/90CRI - 4000Kelvin</p> |
|---|---|--|--|--|

**LUMEN OUTPUT:**



| Watts | 30K     | 35K     | 40K     |
|-------|---------|---------|---------|
| 25W   | 3570 lm | 3660 lm | 3750 lm |
| 50W   | 5800 lm | 5950 lm | 6100 lm |
| 75W   | 8825 lm | 9025 lm | 9225 lm |



Project:

Type:

**SIZE:**

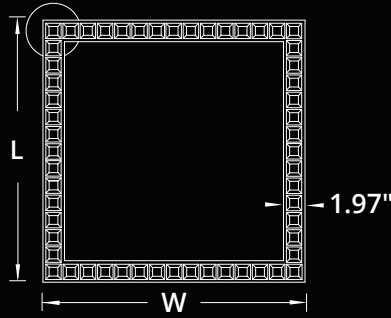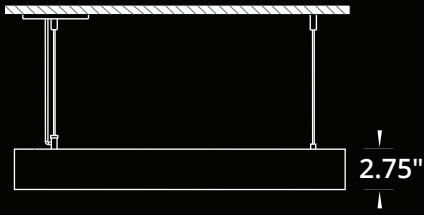

| Size       | L x W              |
|------------|--------------------|
| 2x2x2 Feet | 23.95 x 23.95 Inch |
| 3x3x3 Feet | 34.93 x 34.93 Inch |
| 4x4x4 Feet | 45.93 x 45.93 Inch |

**RADIANCE:**


**DIRECT DISTRIBUTION**




**UNEVEN DISTRIBUTION**




**MOUNTING:**

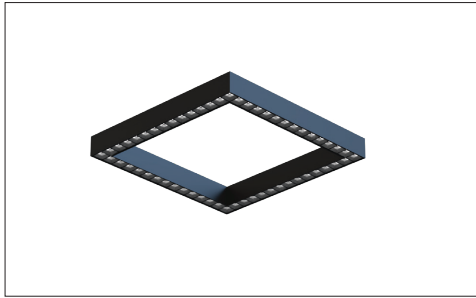


SURFACE MOUNT

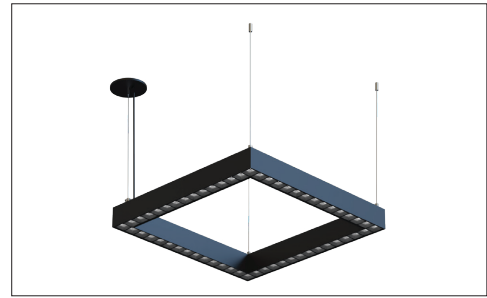

SUSPENDED

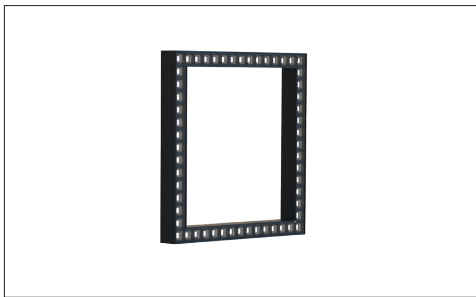

SURFACE MOUNT

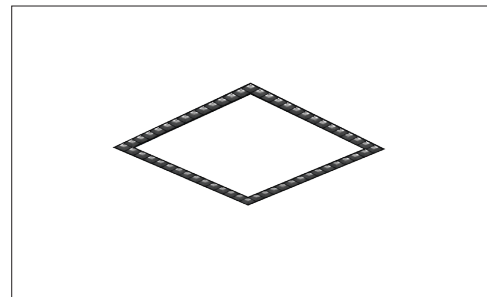

RECESSED TRIMLESS