


**FEATURES:**

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED 5.5" board.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure.
- ✓ Suitable for suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED RING+**



Enter the Product Code into the boxes above.

**SIZE**

- 2 Feet
- 3 Feet
- 4 Feet
- \*

\* Please specify custom size.

**SOURCE**

- 25WLED
- 50WLED
- 75WLED\*

\*Available for 4ft & Custom sizes.  
\*\*Other Wattages are available.

**RADIANCE**

- DD - Direct (100%Down)
- UD - Uneven(70%Down/30%Up)\*\*

\*Light Distribution.  
\*\*Suspended Configuration only.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth
- \*

\* Please specify dimming method.

**MOUNTING**

- C4-Canopy 4Feet\*
- C6-Canopy 6Feet\*
- C  Feet\*\*
- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*\*
- WM - Wall Mount
- SF - Surface Mount

\*Canopy installation is not available for custom sizes.  
\*\*Please specify required Length.

**LENS**

- OP - Opal

**FINISH**

- WH - White
- BK - Black
- GR - Grey
- CF - Custom  RAL#

**CCT**

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- TW - Tunable White\*\* (2700K-6500K)

\*Other options are available.  
\*\*Available with BT control.

**OPTIONS**

- No Options\*
- DC - Dual Circuit\*\*

\*Leave Empty.  
\*\*Down /Up Control separately.

**LUMEN OUTPUT:**

Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6610 lm	6750 lm	6890 lm




Declare.

Project:

Type:

**SIZE:**

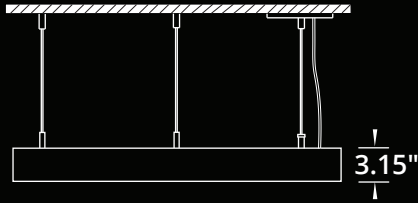

Size	Diameter
2 Feet	25.98 Inch
3 Feet	35.43 Inch
4 Feet	47.24 Inch

**RADIANCE:**

**DIRECT DISTRIBUTION**



**UNEVEN DISTRIBUTION**



**MOUNTING:**




SUSPENDED - CEILING CANOPY



SUSPENDED - STRAIGHT WIRE



SURFACE MOUNT

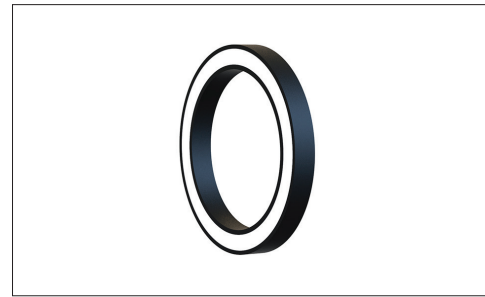

WALL MOUNT