


**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ High efficiency metalized integral reflector is available with 15° Spot, 25° Narrow Flood or 40° Flood Beam angle.
- ✓ Available with optional flat frame plate for NC installation.
- ✓ Suitable for recessed insulated ceilings or damp locations.
- ✓ Round adjustable trim can rotate 350° or tilted up to 30°.
- ✓ LED spot is rated for 60,000hrs. L70 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED AR+**



Enter the Product Code into the boxes above.

**SOURCE**

- 8W LED
- 12W LED

**RADIANCE**

- DD - Direct (100%Down)  
\*Light Distribution.

**VOLTAGE**

- 120V
  - 277V
  - 347V\*
- \*External step down transformer per luminaire.

**DRIVER**

- ST - Standard (Non-Dimming)
  - DL - 0-10V Dimming (1%)
  - DA - DALI
  - \*
- \* Please specify dimming method.

**MOUNTING**


- RT -Retrofit
- NC- New Const. Plate

**REFLECTOR**

- SP - Spot
- NF - Narrow Flood
- FL - Flood

**LOUVER**

- WH - White
- BK - Black
- SL - Silver
- CH - Chrome
- CD - Chrome Dark
- CG - Chrome Gold

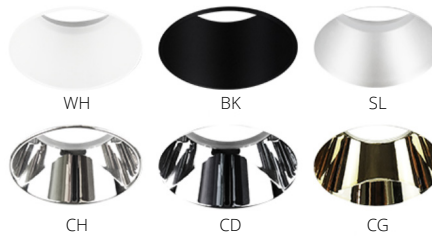


**TRIM**

- WH - White
- BK - Black

**CCT**

- 30K/90CRI - 3000Kelvin
  - 35K/90CRI - 3500Kelvin
  - 40K/90CRI - 4000Kelvin
- \*Other options are available.

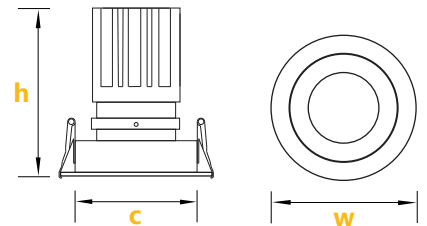

**DIMENSIONS:**

Height	Width	Cut Out
3.625"	3.36"	2.937"

**LUMEN OUTPUT:**


Watts	30K	35K	40K
8W	700 lm	720 lm	740 lm
12W	1050 lm	1080 lm	1110 lm



Project: \_\_\_\_\_

Type: \_\_\_\_\_

**DRIVER BOX:**

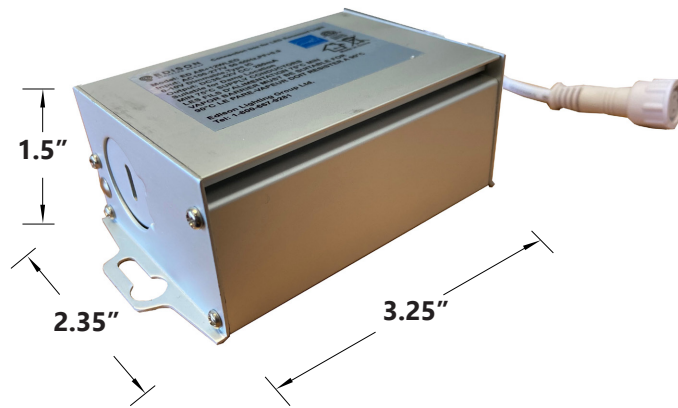

**NC PLATE:**

