



FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED 5.5" Board.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with built-in-driver and available in white, black or grey finish.
- ✓ Sleek body of the luminaire combines two aluminum side with laser cut metal top enclosure.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

SPECIFICATION:

Sonic RING+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

- | | | | | | |
|---|---|--|--|---|---|
| TYPE
<input type="checkbox"/> FV - Flush Vcut
<input type="checkbox"/> FR - Flush Regular
<input type="checkbox"/> RP - Recessed Perforated
<input type="checkbox"/> RA- Recessed Angle
<input type="checkbox"/> <input type="text"/> * | HEIGHT
<input type="checkbox"/> 12 Inch
<input type="checkbox"/> 16 Inch
<input type="checkbox"/> 24 Inch | SIZE
<input type="checkbox"/> 2 Feet
<input type="checkbox"/> 3 Feet
<input type="checkbox"/> 4 Feet | SOURCE
<input type="checkbox"/> 25WLED
<input type="checkbox"/> 50WLED
<input type="checkbox"/> 75WLED*
<small>*Available for 3 & 4 Feet.</small> | RADIANCE
<input type="checkbox"/> DD - Direct (100%Down)
<small>*Light Distribution.</small> | VOLTAGE
<input type="checkbox"/> 120V
<input type="checkbox"/> 277V
<input type="checkbox"/> 347V*
<small>*Not available for all configurations.</small> |
|---|---|--|--|---|---|

- | | | | | |
|---|---|---|---|--|
| DRIVER
<input type="checkbox"/> ST - Standard (Non-Dimming)
<input type="checkbox"/> DL - 0-10V Dimming (1%)
<input type="checkbox"/> DA - DALI
<input type="checkbox"/> BT - Bluetooth
<input type="checkbox"/> <input type="text"/> *
<small>*Please specify dimming method.</small> | MOUNTING
<input type="checkbox"/> S4-Suspension 4Feet
<input type="checkbox"/> S6-Suspension 6Feet
<input type="checkbox"/> S <input type="text"/> Feet*
<small>*Please specify required Length.</small> | LENS
<input type="checkbox"/> OP - Opal | ED RING+ FINISH
<input type="checkbox"/> WH - White
<input type="checkbox"/> BK - Black
<input type="checkbox"/> GR - Grey*
<input type="checkbox"/> CF - Custom <input type="text"/> RAL#
<small>*Supply with White Cord & Canopy
 ** Please provide 600dpi Image.</small> | CCT
<input type="checkbox"/> 30K - 3000Kelvin/90CRI
<input type="checkbox"/> 35K - 3500Kelvin/90CRI
<input type="checkbox"/> 40K - 4000Kelvin/90CRI
<input type="checkbox"/> TW - Tunable White**
(2700K-6500K)
<small>*Other options are available.
 **Available with Dali controls.</small> |
|---|---|---|---|--|

ACOUSTIC FINISH



LUMEN OUTPUT:


Watts	30K	35K	40K
25W	2205 lm	2250 lm	2295 lm
50W	4410 lm	4500 lm	4590 lm
75W	6615 lm	6750 lm	6885 lm



Project:

Type:

SIZE:

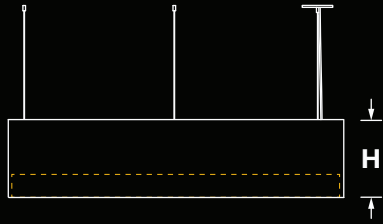

FR-FLUSH REGULAR



D

H - Height	D - Diameter	
12 Inch = 11.75 Inch	2Feet	27.053 Inch
16 Inch = 15.75 Inch	3Feet	36.502 Inch
24 Inch = 23.75 Inch	4Feet	48.313 Inch

DESIGN:



FV - FLUSH VCUT



FR - FLUSH REGULAR



RP - RECESSED PERFORATED



RA - RECESSED ANGLE

FINISHES:



#01



#06



#11



#15