
**FEATURES:**

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: 11" LED Modular board.
- ✓ Dark Optic provides superior lighting distribution with precise low glare illumination.
- ✓ Offered with regular 50°/16UGR, flood 80°/19UGR or asymmetric beam angle.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed installation in to drywall or T-Bar.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options.
- ✓ LED's are rated for 60,000hrs. L80 with +90CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

**SPECIFICATION:**

**ED VECTOR+**  -  -  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

**TYPE**

- 
- DO - Dark Optic

**SIZE**

\_\_\_\_\_ Feet\*  
\* 1Foot increment only.

**SOURCE**

- 
- 5W/Ft LED
- 
- 
- 7W/Ft LED
- 
- 
- 10W/Ft LED

**RADIANCE**

- 
- DD - Direct (100%Down)
- 
- \*Light Distribution.

**VOLTAGE**

- 
- 120V
- 
- 
- 277V
- 
- 
- 347V\*
- 
- \*Not available for all configurations.

**DRIVER**

- 
- ST - Standard
- 
- 
- DL - 0-10V Dimming (1%)
- 
- 
- DA - DALI
- 
- 
- 
- \*
- 
- 
- EC - Emergency Circuit
- 
- \* Please specify dimming method (Phase).

**MOUNTING**

- 
- RS - Recessed
- 
- 
- RB - Recessed T-Bar

**REFLECTOR**

- 
- WH - White
- 
- 
- BK - Black
- 
- 
- SL - Silver

**LENS**

- 
- RB - Regular 50°
- 
- 
- FB - Flood 80°
- 
- 
- AB - Asymmetric

**FINISH**

- 
- WH - White
- 
- 
- BK - Black
- 
- 
- GR - Grey
- 
- 
- CF - Custom
- 
- RAL#

**CCT**

- 
- 30K - 3000Kelvin/90CRI
- 
- 
- 35K - 3500Kelvin/90CRI
- 
- 
- 40K - 4000Kelvin/90CRI

**OPTIONS**

- 
- No Options\*
- 
- 
- CB - Casambi BT
- 
- \*Leave Empty.


**LUMEN OUTPUT W/Ft:**

Watts	30K	35K	40K
5W	610 lm	625 lm	640 lm
7W	855 lm	875 lm	895 lm
10W	1225lm	1250 lm	1275 lm

Project:


Type:

## SIZE:

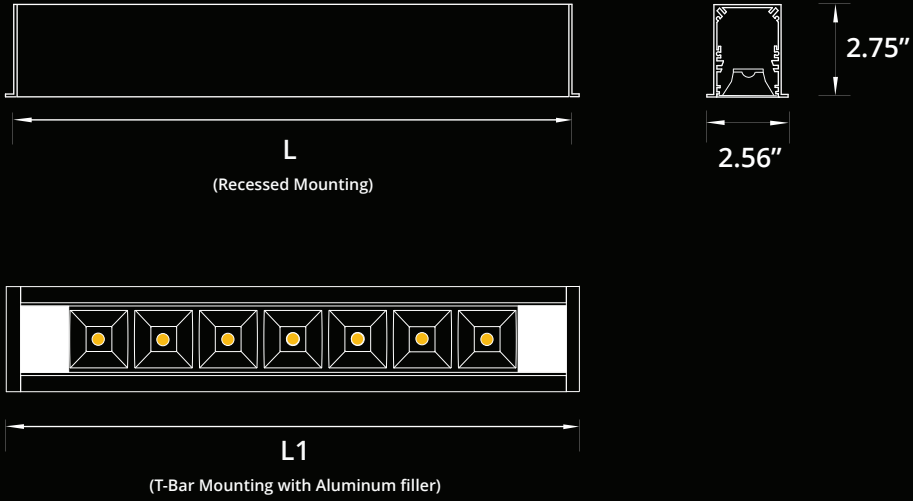


Size	L(CUTOUT)	L1(T-BAR)	LED Strips
1 Feet	11.186 Inch	11.750 Inch	1x11"
2 Feet	22.200 Inch	23.750 Inch	2x11"
3 Feet	33.214 Inch	35.750 Inch	3x11"
4 Feet	44.228 Inch	47.750 Inch	4x11"
5 Feet	55.242 Inch	59.750 Inch	5x11"
6 Feet	66.256 Inch	71.750 Inch	6x11"
7 Feet	77.098 Inch	83.750 Inch	7x11"
8 Feet	88.112 Inch	95.750 Inch	8x11"


## RADIANCE:



## MOUNTING:

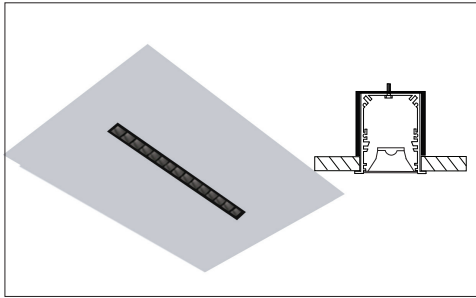


RECESSED

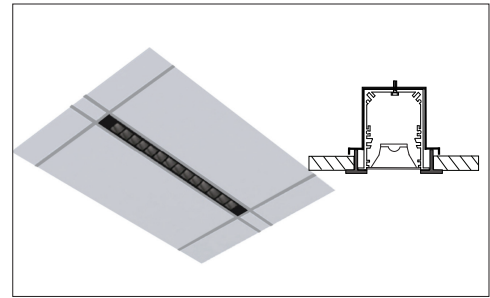


RECESSED T-BAR


## BEAMS:

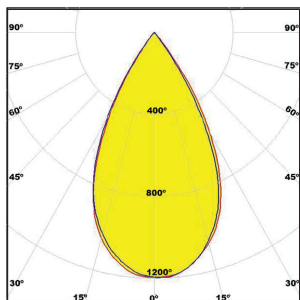

REGULAR BEAM

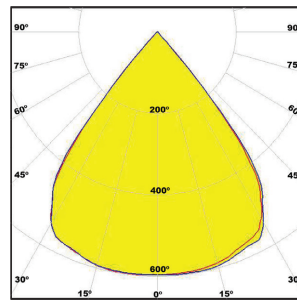

FLOOD BEAM

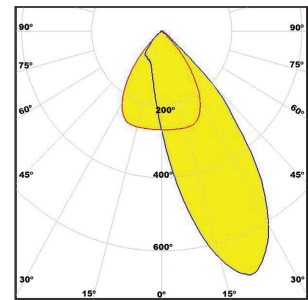

ASYMMETRIC BEAM