

**FEATURES:**

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Even illumination is provided by variety of high efficiency optic lenses.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for suspended, wall mounted installations.
- ✓ Extruded aluminum body comes with black or white finish.
- ✓ Also available with various custom color options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +90 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SPECIFICATION:**

**ED VECTOR5+**  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

**SIZE**

\_\_\_\_\_ Feet

**SOURCE**

- 5W/Ft LED
- 10W/Ft LED
- 15W/Ft LED

**RADIANCE**

- ED - Even(50%Down/50%Up)
- UD - Uneven(70%Down/30%Up)
- DD - Direct (100%Down)
- ID - Indirect (100%Up)

\*Light Distribution.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard (Non-Dimming)
- DL - 0-10V Dimming (1%)
- DA - DALI
- BT - Bluetooth
- \*
- EC - Emergency Circuit
- EM - Emergency\*\*

\*Please specify dimming method.  
\*\*Battery Pack per 4Feet section.

**MOUNTING**

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*
- WM - Wall Mount
- WF - Wall Flush

\*Please specify required Length.

**LENS**

- OP - Opal
- PR - Prismatic

**FINISH**

- BK - Black
- WH - White
- CF - Custom RAL#

**CCT**

- 30K/90CRI - 3000Kelvin
- 35K/90CRI - 3500Kelvin
- 40K/90CRI - 4000Kelvin
- RGBW\*
- TW - Tunable White\*\*  
(2700K-6500K)

\*Available with Dali, DMX or Bluetooth controls.  
\*\*Available with 0-10V,Dali or Bluetooth controls.

**OPTIONS**

- No Options\*
- DR - Damp Rated
- DC - Dual Circuit\*\*
- DOS - Daylight & Occupancy Sensor

\*Leave Empty.  
\*\*Down /Up Control separately.  
\*\*\*Combination example (DR/DOS).

**LUMEN OUTPUT W/Ft:**


| Watts | 30K     | 35K     | 40K     |
|-------|---------|---------|---------|
| 5W    | 535 lm  | 550 lm  | 565 lm  |
| 10W   | 1070 lm | 1100 lm | 1130 lm |
| 15W   | 1610lm  | 1650 lm | 1690 lm |



Project:

Type:

**SIZE:**

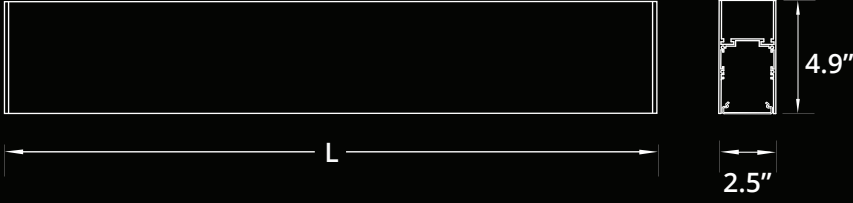

| Size   | L (LENGTH) |
|--------|------------|
| 1 Feet | 11.75 Inch |
| 2 Feet | 24.50 Inch |
| 3 Feet | 35.50 Inch |
| 4 Feet | 48.25 Inch |
| 5 Feet | 59.25 Inch |
| 6 Feet | 72.00 Inch |
| 7 Feet | 83.00 Inch |
| 8 Feet | 95.75 Inch |

**RADIANCE:**


**EVEN DISTRIBUTION**




**UNEVEN DISTRIBUTION**




**MOUNTING:**

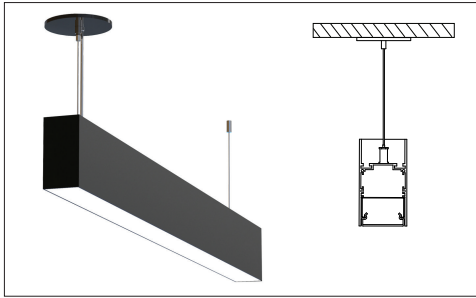


SUSPENDED

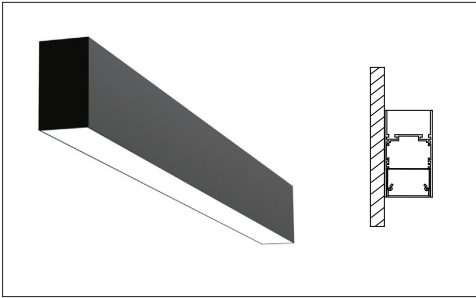

WALL FLUSH

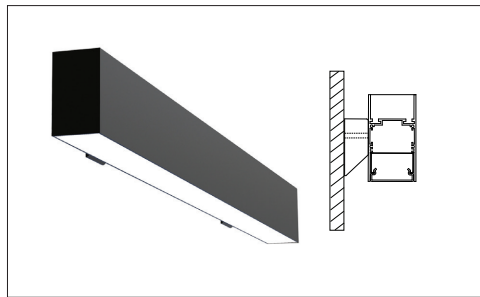

WALL MOUNT

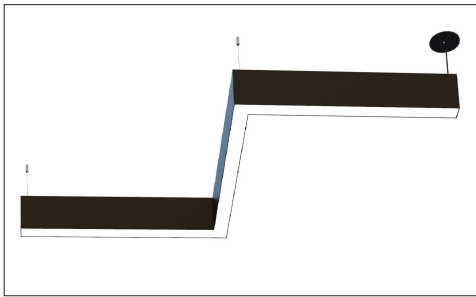

90° LEFT/90° RIGHT WITH