
FEATURES:

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Suitable for surface, suspended and recessed installations.
- ✓ Extruded aluminum body comes with white, black or grey finishes.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SIZE

- 2 Feet
- 3 Feet
- 4 Feet
- *

* Specify required length.
 ** Custom angles are available.

SOURCE

- 25WLED
- 50WLED
- 75WLED*

* Available for 3 & 4 Feet.

RADIANCE

- DD - Direct (100%Down)
- ID - Indirect (100%Up)**
- UD - Uneven(70%Down/30%Up)**

*Light Distribution.
 **Suspended Configuration only.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- *

* Please specify dimming method (ELV).

LENS

- OP - Opal

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#
- VD - Vinyl Decal*

* Please provide 600dpi Image.

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White** (2700K-6500K)

*Other options are available.
 **Available with Dali controls.

OPTIONS

- No Options*
- 90 CRI
- DS - Daylight Sensor
- DC - Dual Circuit**
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

*Leave Empty.
 **Down /Up Control separately.
 ***Combination example (90CRI/DS).

MOUNTING

- S4 - Suspension 4Feet
- S6 - Suspension 6Feet
- S Feet*
- WM - Wall Mount
- SF - Surface Mount
- RT - Recessed Trimless

*Please specify required Length.

LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm

Project:



Type:

SPECIFICATION:
ED CROSS+

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input style="width: 50px; height: 20px;" type="text"/>	<input style="width: 50px; height: 20px;" type="text"/>	<input style="width: 50px; height: 20px;" type="text"/>	<input style="width: 50px; height: 20px;" type="text"/>	<input style="width: 50px; height: 20px;" type="text"/>	<input style="width: 50px; height: 20px;" type="text"/>	<input style="width: 50px; height: 20px;" type="text"/>	<input style="width: 50px; height: 20px;" type="text"/>	<input style="width: 50px; height: 20px;" type="text"/>	<input style="width: 50px; height: 20px;" type="text"/>

Enter the Product Code into the boxes above.

SIZE:

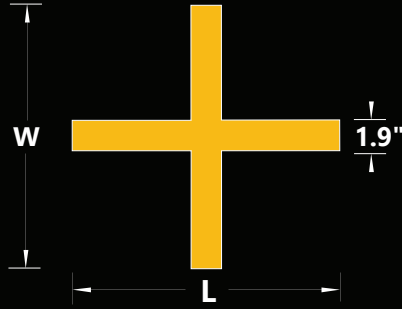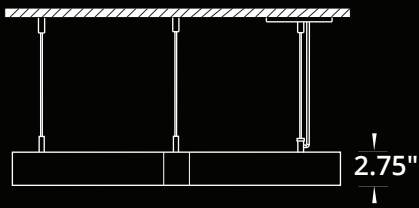

Size	LengthxWidth
2 Feet	23.25x23.25 Inch
3 Feet	34.25x34.25 Inch
4 Feet	45.50x45.50 Inch

RADIANCE:


DIRECT DISTRIBUTION




UNEVEN DISTRIBUTION




MOUNTING:

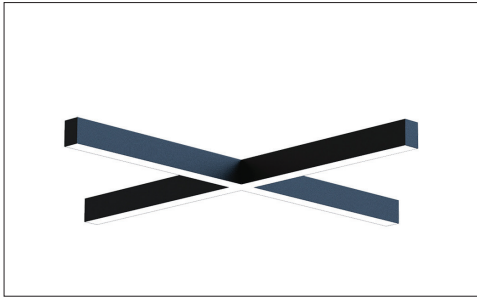


SURFACE MOUNT

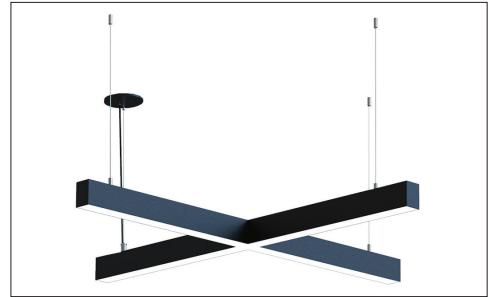

SUSPENDED

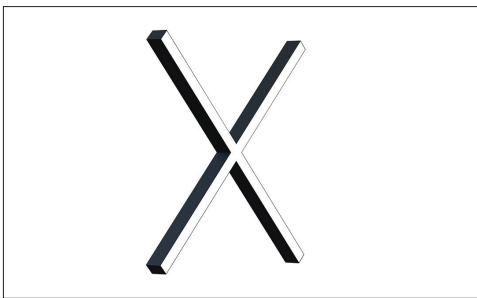

WALL MOUNT

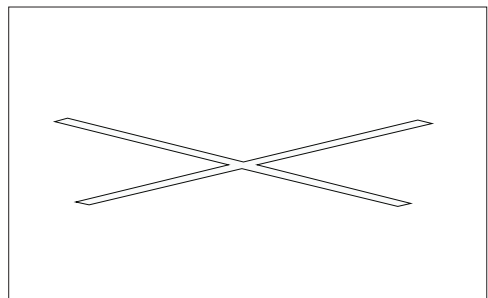

RECESSED TRIMLESS