


FEATURES:

- ✓ Architectural system with direct or direct-indirect lighting distribution.
- ✓ Light source: LED boards.
- ✓ Diffused illumination is provided by high efficiency frosted opal lens or by optional prismatic optic.
- ✓ Sleek body of the luminaire combine two aluminum sides with laser cut metal top enclosure and integrated LED driver.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Available with custom color options or unique shape configurations.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

SPECIFICATION:

ED CURVES+ - - - - - - - - - - -

Custom Shape Example: ED CURVES+CS-1xB45°-2x38.661-2x83.504-7W/Ft LED-DD-120V-ST-S6-OP-WH-30K

Enter the Product Code into the boxes above.

SHAPE

- LN - Line
- CR - Curve
- OV - Oval
- CS - Custom Shape*

* Please provide required design.

SIZE

- | | | | | | | | |
|----------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| A-15° | <input type="checkbox"/> 27.84 | | | | | | |
| B-45° | <input type="checkbox"/> 18.60 | <input type="checkbox"/> 23.20 | <input type="checkbox"/> 30.95 | <input type="checkbox"/> 38.66 | <input type="checkbox"/> 46.38 | <input type="checkbox"/> 83.50 | |
| C -60° | <input type="checkbox"/> 51.57 | <input type="checkbox"/> 62.00 | | | | | |
| D-90° | <input type="checkbox"/> 37.13 | <input type="checkbox"/> 46.38 | <input type="checkbox"/> 61.85 | <input type="checkbox"/> 77.32 | <input type="checkbox"/> 92.80 | | |
| E-120° | <input type="checkbox"/> 35.04 | <input type="checkbox"/> 49.50 | <input type="checkbox"/> 61.85 | <input type="checkbox"/> 82.48 | | | |
| F -135° | <input type="checkbox"/> 39.45 | <input type="checkbox"/> 55.70 | <input type="checkbox"/> 69.60 | <input type="checkbox"/> 92.80 | | | |
| L** | <input type="checkbox"/> 22.83 | <input type="checkbox"/> 33.86 | <input type="checkbox"/> 44.88 | <input type="checkbox"/> 55.90 | <input type="checkbox"/> 66.93 | <input type="checkbox"/> 77.95 | <input type="checkbox"/> 88.98 |

CS***

* All sizes representing Arc Length in Inches.

**Linears are available for Custom Shape.

***Please specify Custom Angle and Length.

SOURCE

- 5W/Ft LED
- 7W/Ft LED
- 10W/Ft LED*

* UD lighting distribution only.

RADIANCE

- DD - Direct (100%Down)
- UD - Uneven(70%Down/30%Up)**

*Light Distribution.

**Suspended Configuration only.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- *

* Please specify dimming method (ELV).

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- SF - Surface Mount

*Please specify required Length.

LENS

- OP - Opal
- PR - Prismatic

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

*Other options are available.

OPTIONS

- No Options*
- 90 CRI
- DC - Dual Circuit**

*Leave Empty.

**Down /Up Control separately.

***Combination example (90CRI/DS).



LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm


Project:

Type:

SIZE:

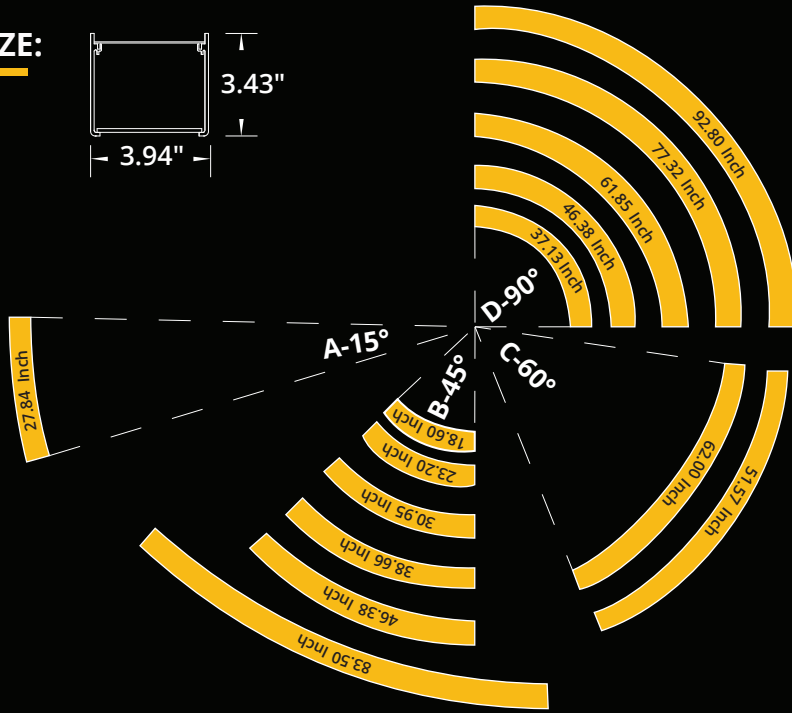

L - LINEAR

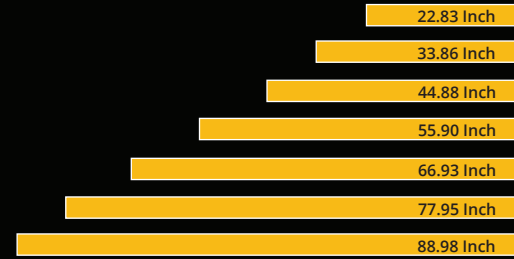

RADIANCE:


DIRECT DISTRIBUTION




UNEVEN DISTRIBUTION




MOUNTING:

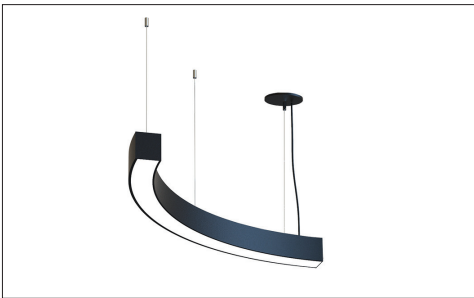


SUSPENDED

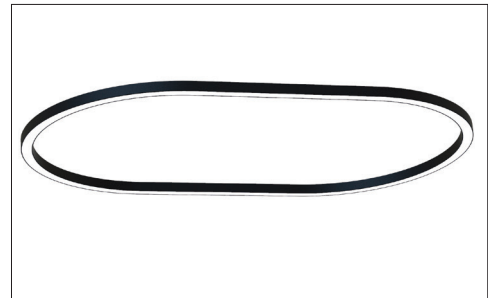

SURFACE MOUNT

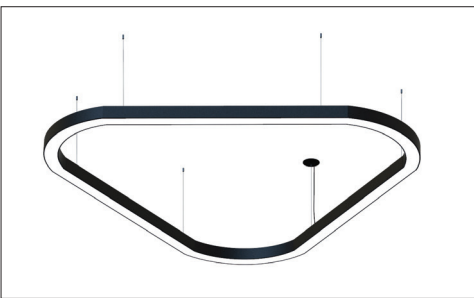

CUSTOM SHAPE

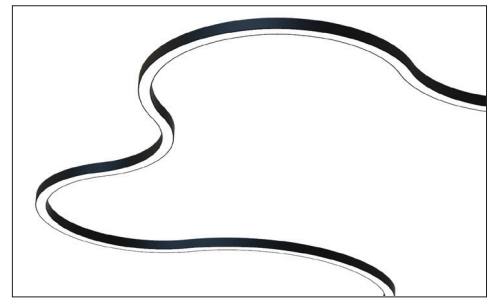

CUSTOM - INFINITY