
**FEATURES:**

- ✓ Architectural luminaire with direct or direct-indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by high efficiency frosted opal lens.
- ✓ Sleek body of the luminaire combines aluminum body with high efficiency opal lens.
- ✓ Suitable for surface, suspended and wall mounted installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

**reinventlight**
**SPECIFICATION:**
**ED DRUM+**

SIZE	SOURCE	RADIANCE	VOLTAGE	DRIVER	MOUNTING	LENS	FINISH	CCT	OPTIONS
<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>	<input style="width: 100%;" type="text"/>

Enter the Product Code into the boxes above.

**SIZE**

- 2 Feet
- 3 Feet
- 4 Feet

**SOURCE**

- 25WLED
- 50WLED
- 75WLED\*

\*Available for 3 &amp; 4 Feet.

**RADIANCE**

- DD - Direct (100%Down)
- ID - Indirect (100%Up)\*\*
- UD - Uneven(70%Down/30%Up)\*\*

\*Light Distribution.

\*\*Suspended Configuration only.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- \*

\* Please specify dimming method (ELV).

**MOUNTING**

- C4-Canopy 4Feet
- C6-Canopy 6Feet
- C Feet\*
- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet\*
- WM - Wall Mount
- SF - Surface Mount

**LENS**

- OP - Opal

**FINISH**

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#
- VD - Vinyl Decal\*

\* Please provide 600dpi Image.

**CCT**

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White\*\*  
(2700K-6500K)

\*Other options are available.

\*\*Available with Dali controls.

**OPTIONS**

- No Options\*
- 90 CRI
- DS-Daylight Sensor
- DC - Dual Circuit\*\*
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

\*Leave Empty.

\*\*Down /Up Control separately.

\*\*\*Combination example (90CRI/DS).



**LUMEN OUTPUT:**

Watts	30K	35K	40K
25W	2610 lm	2650 lm	2690 lm
50W	5150 lm	5250 lm	5380 lm
75W	7720 lm	7875 lm	8030 lm

**Project:**

**Type:**

**SIZE:**

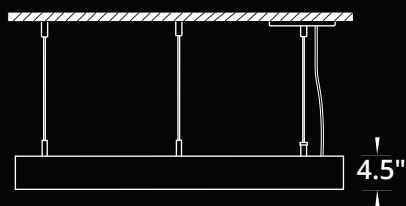

Size	Diameter
2 Feet	23.60 Inch
3 Feet	35.40 Inch
4 Feet	47.20 Inch

**RADIANCE:**

**DIRECT DISTRIBUTION**



**UNEVEN DISTRIBUTION**



**MOUNTING:**



SUSPENDED - CEILING CANOPY



SUSPENDED - STRAIGHT WIRE



SUSPENDED - STEM



SURFACE MOUNT