
FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: LED Module.
- ✓ Unique multioptic lens provide superior lighting distribution with Unified Glare Rating of <19URG.
- ✓ Ideal for computerized offices and educational institutional.
- ✓ Suitable for suspended installation with remote driver.
- ✓ Low profile steel body is available in white, black or grey finish.
- ✓ LED's are rated for 60,000hrs. L70 with +85 CRI.
- ✓ Standard suspension length is 96 Inch.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED RAYS+ — — — — — — — — —

Enter the Product Code into the boxes above.

SOURCE

- 25W LED
- 35W LED

RADIANCE

- DD - Direct (100%Down)
*Light Distribution.

VOLTAGE

- 120V
 - 277V
 - 347V*
- *Not available for all configurations.

DRIVER

- ST - Standard
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - *
- * Please specify dimming method (ELV).

MOUNTING

- S4-Suspension 4Feet
 - S6-Suspension 6Feet
 - S Feet*
- *Please specify required Length.

LENS

- OP - Opal

FINISH

- WH - White
- BK - Black
- GR - Grey

CCT

- 30K - 3000Kelvin
 - 35K - 3500Kelvin
 - 40K - 4000Kelvin
- *Other options are available.

OPTIONS

- No Options*
- 90 CRI
- DS-Daylight Sensor
- DC - Dual Circuit**
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor


*Leave Empty.
 **Down /Up Control separately.
 ***Combination example (90CRI/DS).

DIMENSIONS:

Length	Width	Depth
47.25"	3.5"	0.5"

LUMEN OUTPUT:

Watts	30K	35K	40K
25W	2800 lm	2875 lm	2950 lm
35W	3925 lm	4025 lm	4125 lm

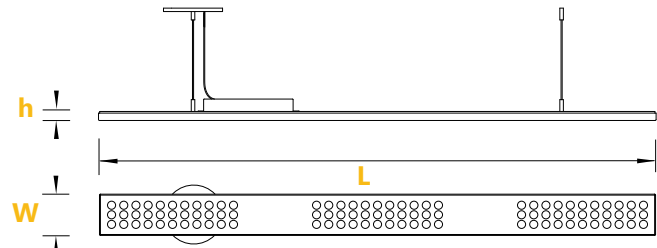

Project:

Type: