



## FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Light source: BIOS SkyBlue LED COB.
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Acoustic polyester is made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ High efficiency integral reflector combined with opal lens insert provides excellent lighting distribution.
- ✓ Square internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ LED COB is rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards. **reinventlight**

## SPECIFICATION:

**Sonic CUBIC+**  -  -  -  -  -  -  -  -  -  -

Enter the Product Code into the boxes above.

### TYPE

- BS - Box

### HEIGHT

- 12 Inch
- 16 Inch
- 24 Inch

### SOURCE

- 15W LED
- 20W LED
- 25W LED

### VOLTAGE

- 120V
- 277V
- 347V\*

### DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- DT - TRIAC

\*Not available for all configurations.  
 \*Functionality and controls may be limited.

### MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*

\*Please specify required Length.

### LOUVER

- WH - White
- BK - Black

### ED CUBIC

- WH - White
- BK - Black
- GR - Grey

### CCT

- 30KS/BIOS - 3000K Static\*
- 35KS/BIOS - 3500K Static\*
- 40KS/BIOS - 4000K Static\*
- 30KD/BIOS - 3000K Dynamic\*\*
- 35KD/BIOS - 3500K Dynamic\*\*
- 40KD/BIOS - 4000K Dynamic\*\*


\*Static-Daytime Use.  
 \*\*Dynamic-Daytime/Evening Use (dims down to 2700K).

### OPTION

- No Options\*
- CB - Casambi BT
- DS - Daylight Sensor
- DC - Dual Circuit\*\*
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

\*Leave Empty.  
 \*\*Down /Up Control separately.  
 \*\*\*Combination example (CB/DS).

## ACOUSTIC FINISH\*

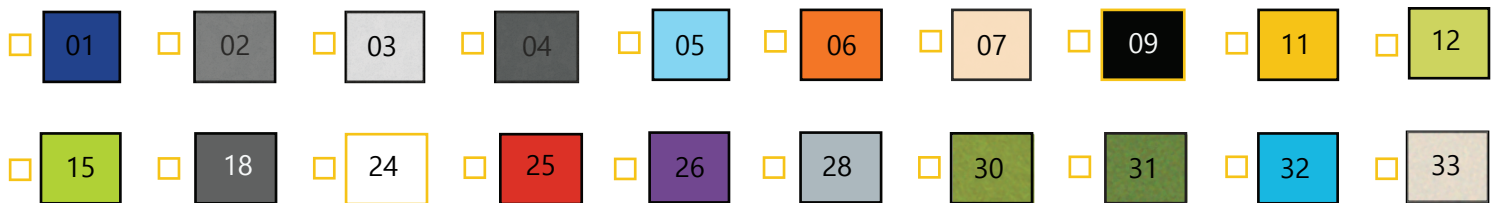


\* Please specify Sides, for example (09/15)


## LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm

### HIGH MELANOPIC RATIO



### LOW MELANOPIC RATIO




**Project:**

**Type:**

SIZE:

L - Length	W - Width	H - Height
12.00 Inch	12.00 Inch	12.00 Inch = 11.75 Inch
16.00 Inch	16.00 Inch	16.00 Inch = 15.75 Inch
24.00 Inch	24.00 Inch	24.00 Inch = 23.75 Inch

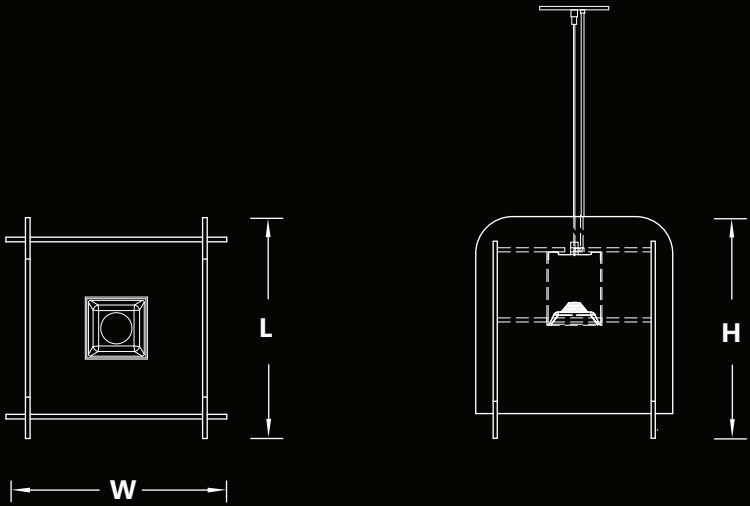

FINISHES:



(06/26)




(25/01)



(09/15)



(02/01)



(05/09)



(06/12)



(25/03)



(01/12)