
FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Light source: LED Board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom colour options.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight
SPECIFICATION:

Sonic VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

TYPE

-
- TS - Trapezoid

HEIGHT

-
- 16 Inch
-
-
- 18 Inch
-
-
- 24 Inch

SIZE

-
- 30 Inch
-
-
- 40 Inch
-
-
- 50 Inch

SOURCE

-
- 20WLED
-
-
- 30WLED
-
-
- 40WLED

RADIANCE

-
- DD - Direct (100%Down)
-
-
- UD - Uneven(70%Down/30%Up)**

 *Light Distribution.
 **Not available for 16Inch Height.

VOLTAGE

-
- 120V
-
-
- 277V
-
-
- 347V*

*Not available for all configurations.

DRIVER

-
- ST - Standard
-
-
- DL - 0-10V Dimming (1%)
-
-
- DA - DALI
-
-
-
- *

* Please specify dimming method (Phase).

MOUNTING

-
- S4-Suspension 4Feet
-
-
- S6-Suspension 6Feet
-
-
- S
-
- Feet*

*Please specify required Length.

LENS

-
- OP - Opal

ED VECTOR+ FINISH

-
- WH - White
-
-
- BK - Black
-
-
- GR - Grey

CCT

-
- 30K - 3000Kelvin
-
-
- 35K - 3500Kelvin
-
-
- 40K - 4000Kelvin
-
-
- TW - Tunable White**
-
- (2700K-6500K)

 *Other options are available.
 **Available with Dali controls.

ACOUSTIC FINISH

<input type="checkbox"/> 01	<input type="checkbox"/> 02	<input type="checkbox"/> 03	<input type="checkbox"/> 04	<input type="checkbox"/> 05	<input type="checkbox"/> 06	<input type="checkbox"/> 07	<input type="checkbox"/> 09	<input type="checkbox"/> 11	<input type="checkbox"/> 12
<input type="checkbox"/> 15	<input type="checkbox"/> 18	<input type="checkbox"/> 24	<input type="checkbox"/> 25	<input type="checkbox"/> 26	<input type="checkbox"/> 28	<input type="checkbox"/> 30	<input type="checkbox"/> 31	<input type="checkbox"/> 32	<input type="checkbox"/> 33


LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
20W	2080 lm	2120 lm	2160 lm
30W	3115 lm	3180 lm	3245 lm
40W	4115 lm	4240 lm	4325 lm


Project:

Type:

SIZE:

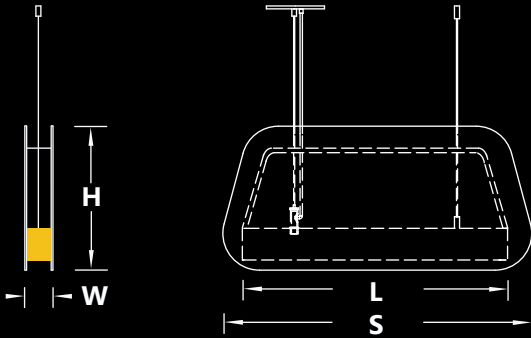

RADIANCE:

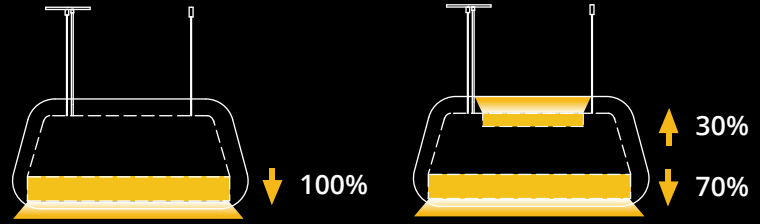

DIRECT DISTRIBUTION

UNEVEN DISTRIBUTION

H - Height	S-Size	L - Luminaire Length	W - Width
16 Inch = 15.75 Inch	30 Inch	22.80 Inch	2.75 Inch
18 Inch = 17.75 Inch	40 Inch	33.80 Inch	
24 Inch = 23.75 Inch	50 Inch	44.80 Inch	

FINISHES:




#01



#11



#26




#15



#25



#18



#32



#06