



FEATURES:

- ✓ Architectural sound absorbing Eco Felt Acoustic panel.
- ✓ Light source: BIOS SkyBlue LED board (5.5"/11"/22").
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Acoustic polyester is made from recyclable plastic material available in different thicknesses.
- ✓ Class1 Fire rated with 0.7 Noise Reduction Coefficient/1" Acoustic.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom colour options.
- ✓ LED Strips are rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:


Sonic VECTOR+ - - - - - - - - - - - -

Enter the Product Code into the boxes above.

- | | | | | | | |
|-------------------------------------|--|--|---|--|--|---|
| TYPE | HEIGHT | SIZE | SOURCE | RADIANCE | VOLTAGE | DRIVER |
| <input type="checkbox"/> CS - Cloud | <input type="checkbox"/> 16 Inch
<input type="checkbox"/> 18 Inch
<input type="checkbox"/> 24 Inch | <input type="checkbox"/> 32 Inch
<input type="checkbox"/> 42 Inch
<input type="checkbox"/> 52 Inch | <input type="checkbox"/> 20WLED
<input type="checkbox"/> 30WLED
<input type="checkbox"/> 40WLED | <input type="checkbox"/> DD - Direct (100%Down)
<small>*Light Distribution.</small> | <input type="checkbox"/> 120V
<input type="checkbox"/> 277V
<input type="checkbox"/> 347V* | <input type="checkbox"/> ST - Standard
<input type="checkbox"/> DL - 0-10V Dimming (1%)
<input type="checkbox"/> DA - DALI
<input type="checkbox"/> DT - TRIAC |
- *Not available for all configurations.
*Functionality and controls may be limited.


- | | | | | |
|--|------------------------------------|--|---|--|
| MOUNTING | LENS | ED VECTOR+ | CCT | OPTION |
| <input type="checkbox"/> S4-Suspension 4Feet
<input type="checkbox"/> S6-Suspension 6Feet
<input type="checkbox"/> S <input type="text"/> Feet*
<small>*Please specify required Length.</small> | <input type="checkbox"/> OP - Opal | <input type="checkbox"/> WH - White
<input type="checkbox"/> BK - Black
<input type="checkbox"/> GR - Grey | <input type="checkbox"/> 30KS/BIOS - 3000K Static*
<input type="checkbox"/> 35KS/BIOS - 3500K Static*
<input type="checkbox"/> 40KS/BIOS - 4000K Static*
<input type="checkbox"/> 30KD/BIOS - 3000K Dynamic**
<input type="checkbox"/> 35KD/BIOS - 3500K Dynamic**
<input type="checkbox"/> 40KD/BIOS - 4000K Dynamic**
<small>*Static-Daytime Use.
**Dynamic-Daytime/Evening Use (dims down to 2700K).</small> | <input type="checkbox"/> No Options*
<input type="checkbox"/> CB - Casambi BT
<input type="checkbox"/> DR - Damp Rated
<input type="checkbox"/> DS - Daylight Sensor
<input type="checkbox"/> DC - Dual Circuit**
<input type="checkbox"/> OS - Occupancy Sensor
<input type="checkbox"/> DOS - Daylight & Occupancy Sensor
<small>*Leave Empty.
**Down /Up Control separately.
***Combination example (DR/DS).</small> |

ACOUSTIC FINISH

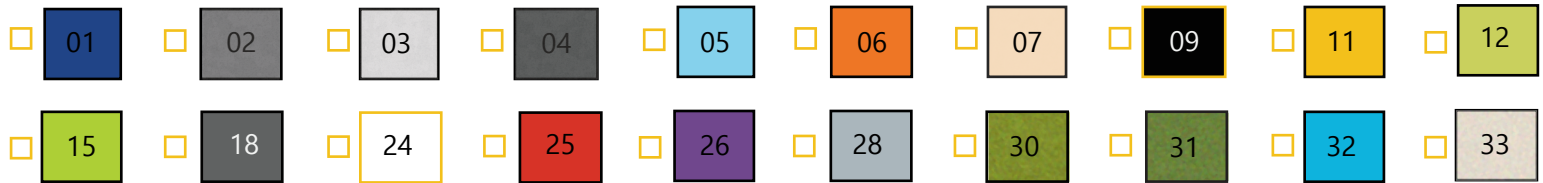

LUMEN OUTPUT W/Ft:


Watts	30K	35K	40K
20W	2080 lm	2120 lm	2160 lm
30W	3115 lm	3180 lm	3245 lm
40W	4115 lm	4240 lm	4325 lm

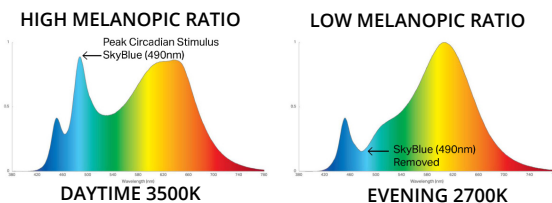


Project:

Type:

SIZE:

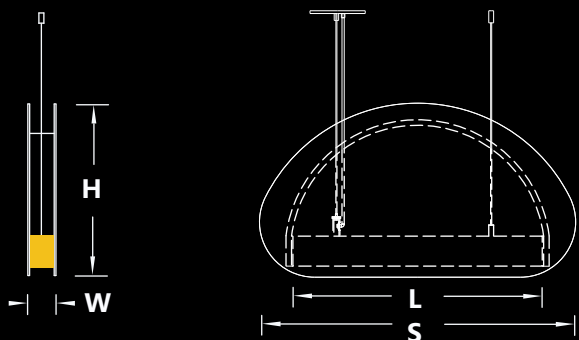


RADIANCE:

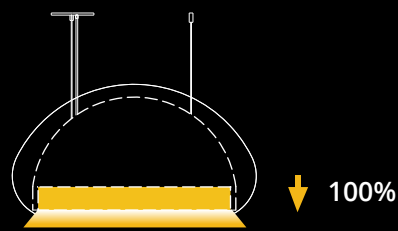

DIRECT DISTRIBUTION

H - Height	S-Size	L - Luminaire Length	W - Width
16 Inch = 15.75 Inch	32 Inch	22.80 Inch	2.75 Inch
18 Inch = 17.75 Inch	42 Inch	33.80 Inch	
24 Inch = 23.75 Inch	52 Inch	44.80 Inch	


FINISHES:




#01



#25



#11




#32




#26



#18



#06



#15