


FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: BIOS SkyBlue LED COB.
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ High efficiency integral reflector combined with opal lens insert provide excellent lighting distribution with 40° Beam.
- ✓ Circular internal louver is available in a wide range of finishes.
- ✓ Aluminum body of the luminaire comes with built-in-driver.
- ✓ Suitable for suspended and surface mounted installations.
- ✓ LED COB is rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED TUBE+ — — — — — — — — —

Enter the Product Code into the boxes above.

SOURCE

- 15W LED
- 20W LED
- 25W LED

RADIANCE

- DD - Direct (100%Down)
- *Light Distribution.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.
*Functionality and controls may be limited.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DT - TRIAC
- *

* Please specify dimming method.

MOUNTING

- SF - Surface Mount
- S4 - Suspension 4Feet
- S6 - Suspension 6Feet
- S Feet*

* Please specify required Length.

LOUVER

- WH - White
- BK - Black
- SL - Silver
- GL - Gold
- RG - Rose Gold

FINISH

- WH - White
 - BK - Black
 - GR - Grey*
- *Supply with White Cord & Canopy.

CCT

- 30KS/BIOS - 3000K Static*
- 35KS/BIOS - 3500K Static*
- 40KS/BIOS - 4000K Static*
- 30KD/BIOS - 3000K Dynamic**
- 35KD/BIOS - 3500K Dynamic**
- 40KD/BIOS - 4000K Dynamic**

*Static-Daytime Use.
**Dynamic-Daytime/Evening Use (dims down to 2700K).


OPTIONS

- No Options*
- CB - Casambi BT


*Leave Empty.

DIMENSIONS:

Width	Height
4.5"	6.0"

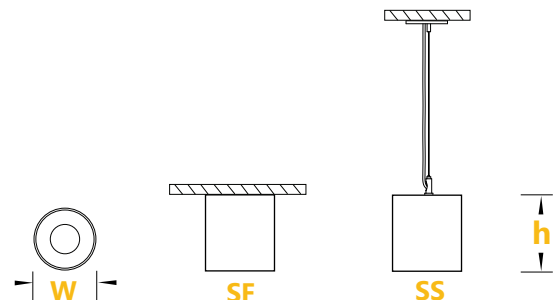
LUMEN OUTPUT:

Watts	30K	35K	40K
15W	1400 lm	1430 lm	1460 lm
20W	1910 lm	1950 lm	1990 lm
25W	2350 lm	2400 lm	2450 lm

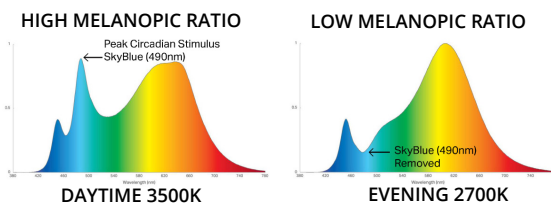

Project:

Type: