
**FEATURES:**

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended and recessed trimless installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SIZE**

\_\_\_\_\_ Feet

**SOURCE**

- 5W/Ft LED
- 7W/Ft LED
- 10W/Ft LED

**RADIANCE**

- DD - Direct (100%Down)
- UD - Uneven(70%Down/30%Up)\*\*

\*Light Distribution.  
 \*\*Suspended Configuration only.

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**LUMEN OUTPUT W/Ft:**

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm

**DRIVER**

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- \*
- EC - Emergency Circuit
- EM - Emergency\*\*

\* Please specify dimming method (ELV).  
 \*\*Battery Pack per 4Feet section.

**MOUNTING**

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*
- WM - Wall Mount
- WF - Wall Flush
- SF - Surface Mount
- RT - Recessed Trimless

\*Please specify required Length.

**LENS**

- OP - Opal
- PR - Prismatic

**FINISH**

- WH - White
- BK - Black
- GR - Grey
- CF - Custom  RAL#
- VD - Vinyl Decal\*

\* Please provide 600dpi Image.

**CCT**

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White\*\* (2700K-6500K)

\*Other options are available.  
 \*\*Available with Dali controls.

**OPTIONS**

- No Options\*
- 90 CRI
- DS-Daylight Sensor
- DC - Dual Circuit\*\*
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

\*Leave Empty.  
 \*\*Down /Up Control separately.  
 \*\*\*Combination example (90CRI/DS).

Project:


Type:

**SPECIFICATION:**

 ED VECTOR2+  SIZE  — SOURCE  — RADIANCE  — VOLTAGE  — DRIVER  — MOUNTING  — LENS  — FINISH  — CCT  — OPTIONS 

Enter the Product Code into the boxes above.

## SIZE:

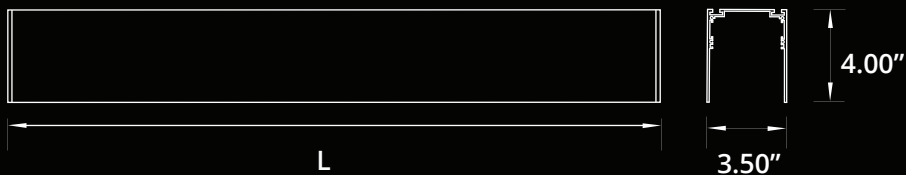

Size	L (LENGTH)
1 Feet	11.75 Inch
2 Feet	24.50 Inch
3 Feet	35.50 Inch
4 Feet	48.25 Inch
5 Feet	59.25 Inch
6 Feet	72.00 Inch
7 Feet	83.00 Inch
8 Feet	95.75 Inch

## RADIANCE:


**DIRECT DISTRIBUTION**




**UNEVEN DISTRIBUTION**




## MOUNTING:

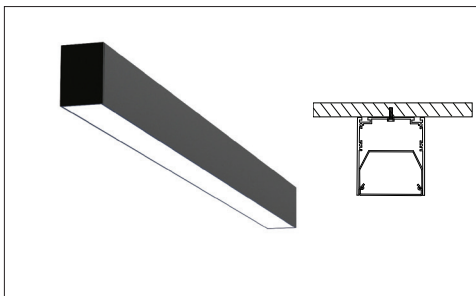


**SURFACE MOUNT**

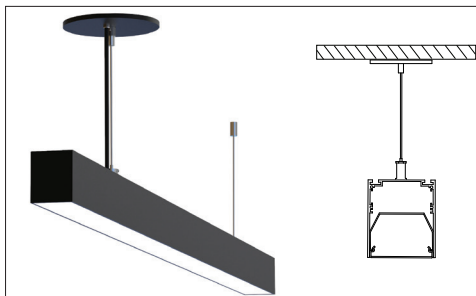


**SUSPENDED**

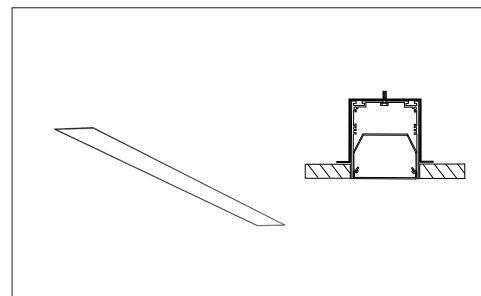


**RECESSED TRIMLESS**

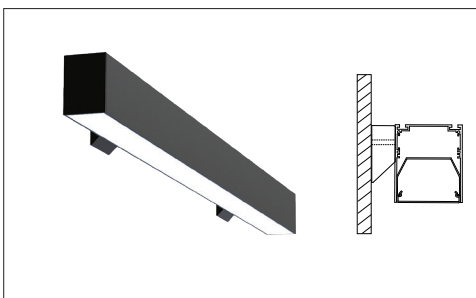

**WALL MOUNT**

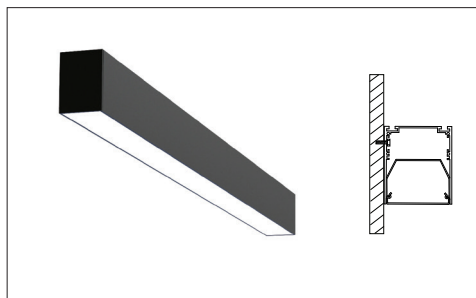

**WALL FLUSH**

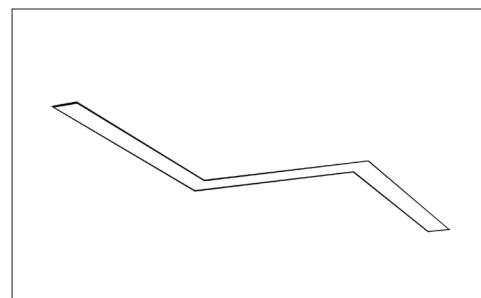

**90° LEFT/90° RIGHT**