

## FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed, recessed T-Bar installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

### SIZE

\_\_\_\_\_ Feet

### SOURCE

- 5W/Ft LED
- 7W/Ft LED
- 10W/Ft LED

### DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- \*
- EC - Emergency Circuit
- EM - Emergency\*\*

\* Please specify dimming method (ELV).  
 \*\*Battery Pack per 4Feet section.

### LENS

- OP - Opal
- PR - Prismatic

### CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White\*\* (2700K-6500K)

\*Other options are available.  
 \*\*Available with Dali controls.

### RADIANCE

- DD - Direct (100%Down)
- \*Light Distribution.

### MOUNTING

- RS - Recessed
- RB - Recessed T-Bar

### FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom  RAL#
- VD - Vinyl Decal\*

\* Please provide 600dpi Image.

### OPTIONS

- No Options\*
- 90 CRI
- DS-Daylight Sensor
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

\*Leave Empty.  
 \*\*Combination example (90CRI/DS).

### VOLTAGE

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

### LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030 lm	1050 lm	1080 lm

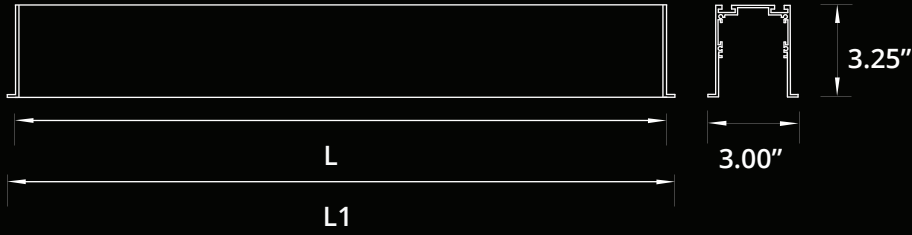
**Project:** \_\_\_\_\_

**Type:** \_\_\_\_\_

### SPECIFICATION:

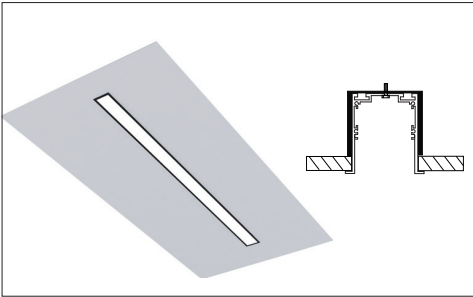
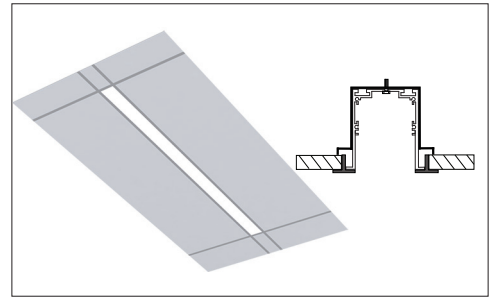
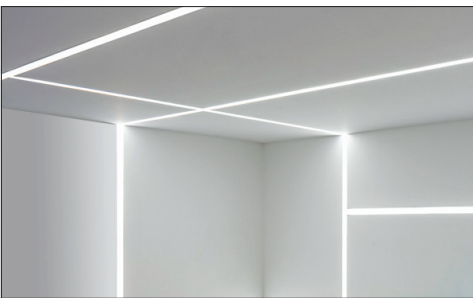
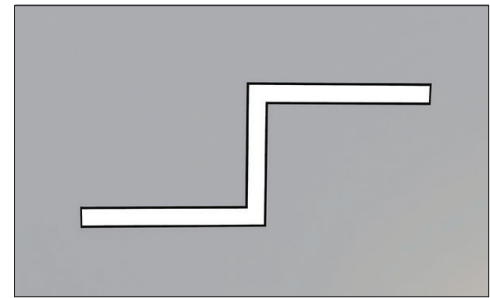
**ED VECTOR3+**

Enter the Product Code into the boxes above.

**SIZE:**


Size	L(CUTOUT)	L1(T-BAR)
1 Feet	11.75 Inch	11.75 Inch
2 Feet	24.50 Inch	23.75 Inch
3 Feet	35.50 Inch	35.75 Inch
4 Feet	48.25 Inch	47.75 Inch
5 Feet	59.25 Inch	59.75 Inch
6 Feet	72.00 Inch	71.75 Inch
7 Feet	83.00 Inch	83.75 Inch
8 Feet	95.75 Inch	95.75 Inch

**RADIANCE:**
**DIRECT DISTRIBUTION**

**MOUNTING:**

**RECESSED**

**RECESSED T-BAR**

**90° IN (WALL TO CEILING)**

**90° LEFT/90° RIGHT**