



FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: BIOS SkyBlue LED board (5.5"/11"/22").
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Diffused illumination is provided by regressed opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed drywall or recessed T-Bar installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTOR4+ SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS


Enter the Product Code into the boxes above.

- SIZE** _____ Feet
- SOURCE**
- 5W/Ft LED
 - 7W/Ft LED
 - 10W/Ft LED
- RADIANCE**
- DD - Direct (100%Down)
- *Light Distribution.
- VOLTAGE**
- 120V
 - 277V
 - 347V*
- *Not available for all configurations.
*Functionality and controls may be limited.
- DRIVER**
- ST - Standard
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - DT - TRIAC

- MOUNTING**
- RS - Recessed
 - RB - Recessed T-Bar
- LENS**
- OR - Opal Regressed
- FINISH**
- WH - White
 - BK - Black
 - GR - Grey
 - CF - Custom
- CCT**
- 30KS/BIOS - 3000K Static*
 - 35KS/BIOS - 3500K Static*
 - 40KS/BIOS - 4000K Static*
 - 30KD/BIOS - 3000K Dynamic**
 - 35KD/BIOS - 3500K Dynamic**
 - 40KD/BIOS - 4000K Dynamic**
- *Static-Daytime Use.
**Dynamic-Daytime/Evening Use (dims down to 2700K).
- OPTIONS**
- No Options*
 - CB - Casambi BT
 - DS - Daylight Sensor
 - OS - Occupancy Sensor
 - DOS - Daylight & Occupancy Sensor
- *Leave Empty.
**Combination example (CB/DS).

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030 lm	1050 lm	1080 lm

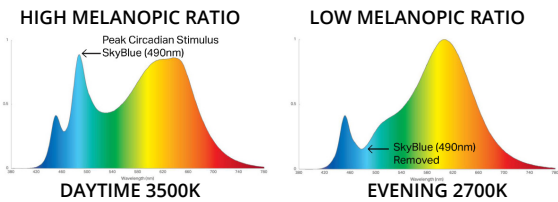

Project: _____

Type: _____

SIZE:




Size	L(CUTOUT)	L1(T-BAR)
1 Feet	11.75 Inch	11.75 Inch
2 Feet	22.75 Inch	23.75 Inch
3 Feet	33.75 Inch	35.75 Inch
4 Feet	44.75 Inch	47.75 Inch
5 Feet	55.75 Inch	59.75 Inch
6 Feet	66.75 Inch	71.75 Inch
7 Feet	77.75 Inch	83.75 Inch
8 Feet	88.75 Inch	95.75 Inch

RADIANCE:


DIRECT DISTRIBUTION




MOUNTING:

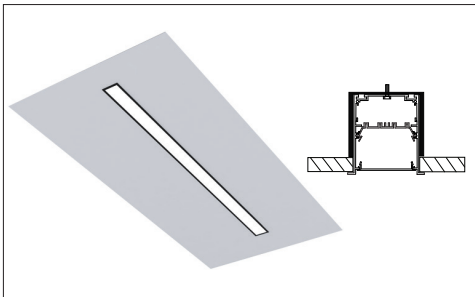


RECESSED

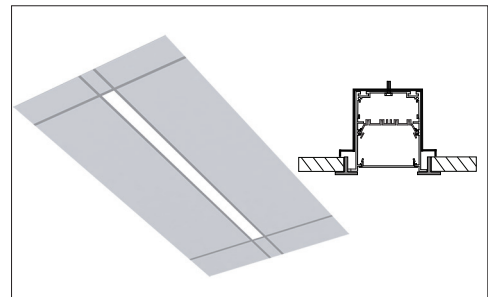

RECESSED T-BAR

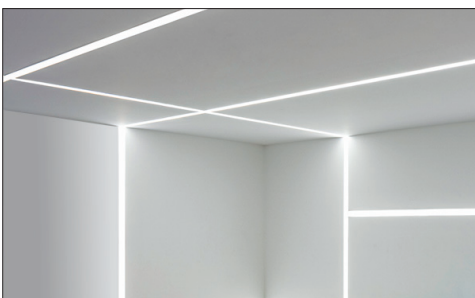

90° IN (WALL TO CEILING)

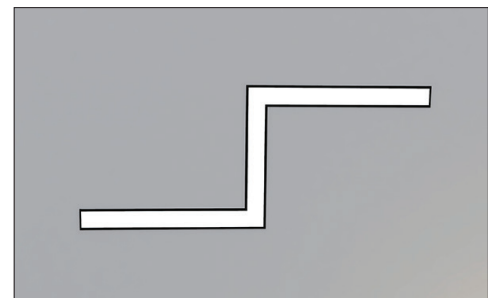

90° LEFT/90° RIGHT