
FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by regressed opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed, recessed T-Bar installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTOR4+ SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

SIZE

_____ Feet

SOURCE

- 5W/Ft LED
- 7W/Ft LED
- 10W/Ft LED

RADIANCE

- DD - Direct (100%Down)
- *Light Distribution.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- *
- EC - Emergency Circuit
- EM - Emergency**

*Please specify dimming method (ELV).
**Battery Pack per 4Feet section.

MOUNTING

- RS - Recessed
- RB - Recessed T-Bar

LENS

- OR - Opal Regressed

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom
- VD - Vinyl Decal*

*Please provide 600dpi Image.

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White** (2700K-6500K)

*Other options are available.
**Available with Dali controls.

OPTIONS

- No Options*
- 90 CRI
- DS - Daylight Sensor
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

*Leave Empty.
**Combination example (90CRI/DS).

LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030 lm	1050 lm	1080 lm

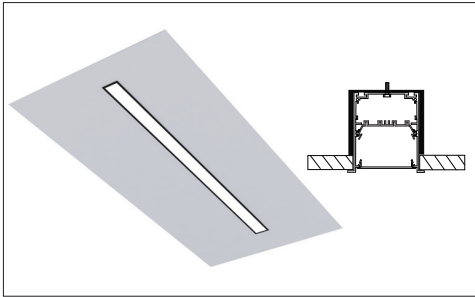
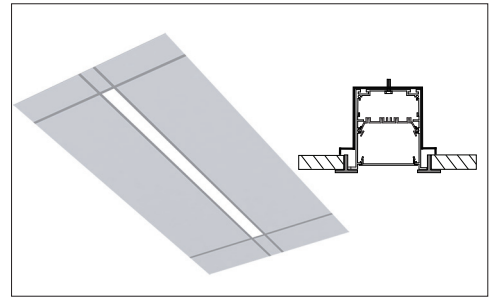
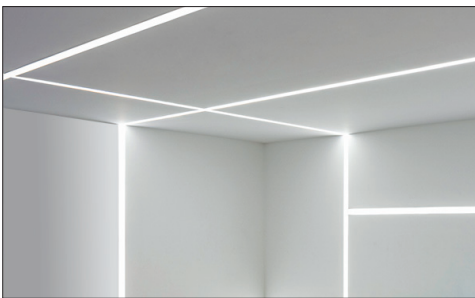
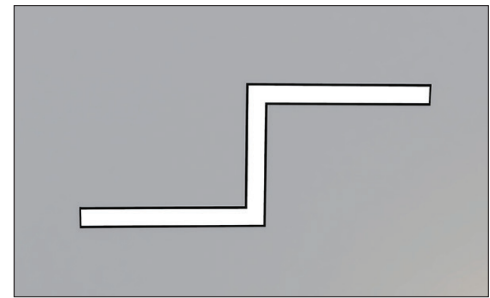
Project:

Type:

SIZE:


Size	L(CUTOUT)	L1(T-BAR)
1 Feet	11.75 Inch	11.75 Inch
2 Feet	24.50 Inch	23.75 Inch
3 Feet	35.50 Inch	35.75 Inch
4 Feet	48.25 Inch	47.75 Inch
5 Feet	59.25 Inch	59.75 Inch
6 Feet	72.00 Inch	71.75 Inch
7 Feet	83.00 Inch	83.75 Inch
8 Feet	95.75 Inch	95.75 Inch

RADIANCE:
DIRECT DISTRIBUTION

MOUNTING:

RECESSED

RECESSED T-BAR

90° IN (WALL TO CEILING)

90° LEFT/90° RIGHT