

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: BIOS SkyBlue LED board (5.5"/11"/22").
- ✓ Circadian lighting technology with highest melanopic ratio improves daytime alertness, mood, productivity and brain function.
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, recessed and damp area installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ LED Strips are rated for 50,000hrs. L80 with +80 CRI.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTOR+ — — — — — — — — — —


Enter the Product Code into the boxes above.

<h3>SIZE</h3> <p>_____ Feet</p>	<h3>SOURCE</h3> <ul style="list-style-type: none"> <input type="checkbox"/> 5W/Ft LED <input type="checkbox"/> 7W/Ft LED <input type="checkbox"/> 10W/Ft LED 	<h3>RADIANCE</h3> <ul style="list-style-type: none"> <input type="checkbox"/> DD - Direct (100%Down) <input type="checkbox"/> ID - Indirect (100%Up)** <input type="checkbox"/> UD - Uneven(70%Down/30%Up)** <p><small>*Light Distribution. **Not suitable for Surface Mount Configuration only.</small></p>	<h3>VOLTAGE</h3> <ul style="list-style-type: none"> <input type="checkbox"/> 120V <input type="checkbox"/> 277V <input type="checkbox"/> 347V* <p><small>*Not available for all configurations. *Functionality and controls may be limited.</small></p>	<h3>DRIVER</h3> <ul style="list-style-type: none"> <input type="checkbox"/> ST - Standard <input type="checkbox"/> DL - 0-10V Dimming (1%) <input type="checkbox"/> DA - DALI <input type="checkbox"/> DT - TRIAC
---------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

<h3>MOUNTING</h3> <ul style="list-style-type: none"> <input type="checkbox"/> S4-Suspension 4Feet <input type="checkbox"/> S6-Suspension 6Feet <input type="checkbox"/> S <input type="text"/> Feet* <input type="checkbox"/> WM - Wall Mount <input type="checkbox"/> WF - Wall Flush <input type="checkbox"/> SF - Surface Mount <input type="checkbox"/> RT - Recessed Trimless <p><small>*Please specify required Length.</small></p>	<h3>LENS</h3> <ul style="list-style-type: none"> <input type="checkbox"/> OP - Opal <input type="checkbox"/> PR - Prismatic <input type="checkbox"/> BL - Black Lens <input type="checkbox"/> AR - Aluminum Reflector* <p><small>* Available for 4Feet only.</small></p>	<h3>FINISH</h3> <ul style="list-style-type: none"> <input type="checkbox"/> WH - White <input type="checkbox"/> BK - Black <input type="checkbox"/> GR - Grey <input type="checkbox"/> CF - Custom <input type="text" value="RAL#"/> 	<h3>CCT</h3> <ul style="list-style-type: none"> <input type="checkbox"/> 30KS/BIOS - 3000K Static* <input type="checkbox"/> 35KS/BIOS - 3500K Static* <input type="checkbox"/> 40KS/BIOS - 4000K Static* <input type="checkbox"/> 30KD/BIOS - 3000K Dynamic** <input type="checkbox"/> 35KD/BIOS - 3500K Dynamic** <input type="checkbox"/> 40KD/BIOS - 4000K Dynamic** <p><small>*Static-Daytime Use. **Dynamic-Daytime/Evening Use (dims down to 2700K).</small></p>	<h3>OPTIONS</h3> <ul style="list-style-type: none"> <input type="checkbox"/> No Options* <input type="checkbox"/> CB - Casambi BT <input type="checkbox"/> DR - Damp Rated <input type="checkbox"/> DS - Daylight Sensor <input type="checkbox"/> DC - Dual Circuit** <input type="checkbox"/> OS - Occupancy Sensor <input type="checkbox"/> DOS - Daylight & Occupancy Sensor <p><small>*Leave Empty. **Down /Up Control separately. ***Combination example (DR/DS).</small></p>
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm

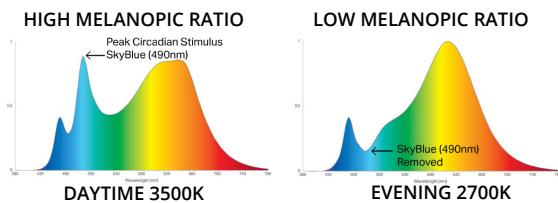

Project: _____


Type: _____

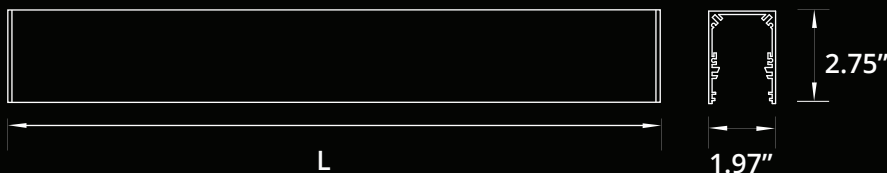SIZE:


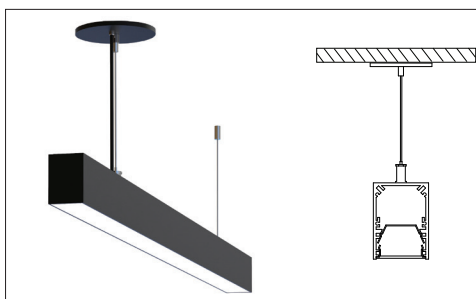
Size	L (LENGTH)
1 Feet	11.75 Inch
2 Feet	22.75 Inch
3 Feet	33.75 Inch
4 Feet	44.75 Inch
5 Feet	55.75 Inch
6 Feet	66.75 Inch
7 Feet	77.75 Inch
8 Feet	88.75 Inch

RADIANCE:
DIRECT DISTRIBUTION


UNEVEN DISTRIBUTION

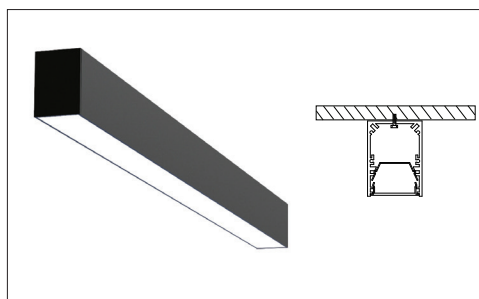MOUNTING:


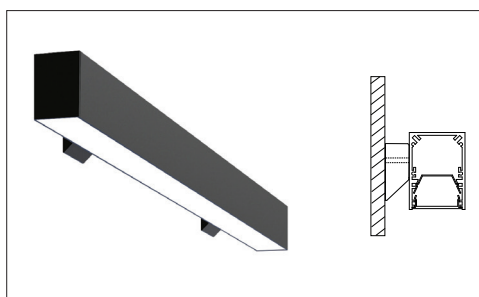
SURFACE MOUNT




SUSPENDED

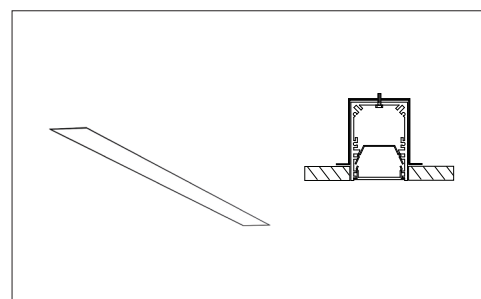


RECESSED TRIMLESS



WALL MOUNT

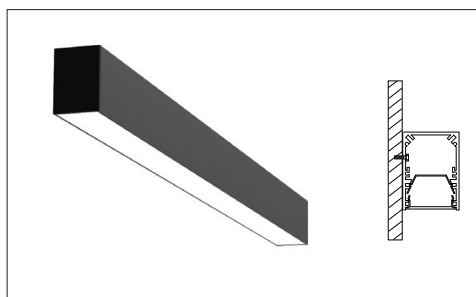

WALL FLUSH

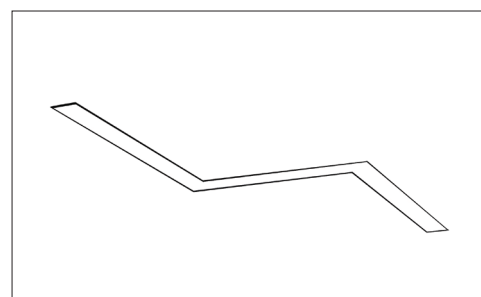

90° LEFT/90° RIGHT