

FEATURES:

- ✓ Architectural linear luminaire with direct distribution.
- ✓ Light source: LED board (5.5"/11"/22"/24").
- ✓ Diffused illumination is provided by frosted opal lens.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for recessed, recessed T-Bar and damp area installations.
- ✓ Extruded aluminum body comes in white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED Strips are rated for 60,000hrs. L80 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:


Enter the Product Code into the boxes above.

SIZE
 _____ Feet

- SOURCE**
- 5W/Ft LED
 - 7W/Ft LED
 - 10W/Ft LED

- RADIANCE**
- DD - Direct (100%Down)
- *Light Distribution.

- VOLTAGE**
- 120V
 - 277V
 - 347V*
- *Not available for all configurations.

- DRIVER**
- ST - Standard
 - DL - 0-10V Dimming (1%)
 - DA - DALI
 - *
 - EC - Emergency Circuit
 - EM - Emergency**
- * Please specify dimming method (ELV).
 **Battery Pack per 4Feet section.

- MOUNTING**
- RS - Recessed
 - RB - Recessed T-Bar

- LENS**
- OP - Opal
 - PR - Prismatic
 - BL - Black Lens
 - AR - Aluminum Reflector*
- * Available for 4Feet only.

- FINISH**
- WH - White
 - BK - Black
 - GR - Grey
 - CF - Custom
 - VD - Vinyl Decal*
- * Please provide 600dpi Image.

- CCT**
- 30K - 3000Kelvin
 - 35K - 3500Kelvin
 - 40K - 4000Kelvin
 - TW - Tunable White** (2700K-6500K)
- *Other options are available.
 **Available with Dali controls.

- OPTIONS**
- No Options*
 - 90 CRI
 - DR - Damp Rated
 - DS - Daylight Sensor
 - OS - Occupancy Sensor
 - DOS - Daylight & Occupancy Sensor
- *Leave Empty.
 **Combination example (90CRI/DS).


LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
5W	515 lm	525 lm	535 lm
7W	720 lm	735 lm	750 lm
10W	1030lm	1050 lm	1080 lm

Project:

Type:

SIZE:

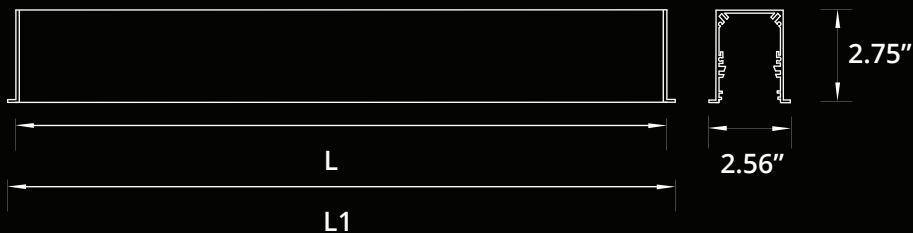


Size	L(CUTOUT)	L1(T-BAR)
1 Feet	11.813 Inch	11.750 Inch
2 Feet	24.563 Inch	23.750 Inch
3 Feet	35.563 Inch	35.750 Inch
4 Feet	48.313 Inch	47.750 Inch
5 Feet	59.313 Inch	59.750 Inch
6 Feet	72.063 Inch	71.750 Inch
7 Feet	83.063 Inch	83.750 Inch
8 Feet	95.813 Inch	95.750 Inch

RADIANCE:


DIRECT DISTRIBUTION




MOUNTING:

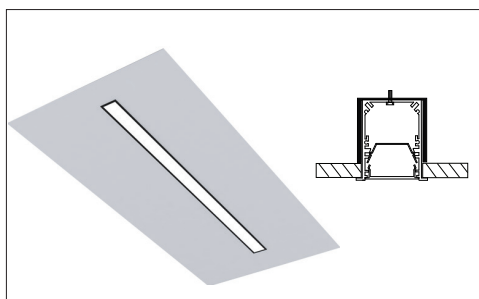


RECESSED

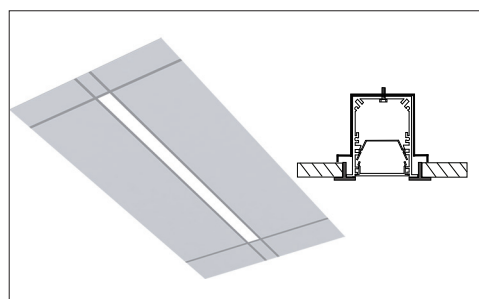

RECESSED T-BAR

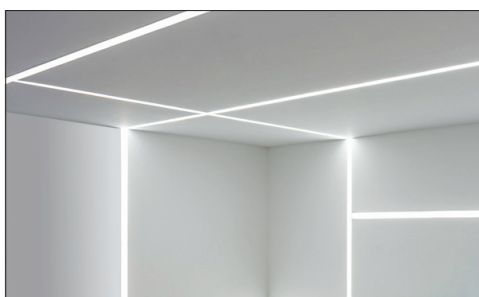

90° IN (WALL TO CEILING)

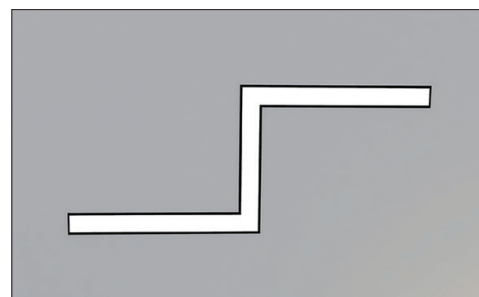

RECESSED-90° LEFT/90° RIGHT