

FEATURES:

- ✓ Architectural linear luminaire with direct or direct/indirect distribution.
- ✓ Light source: LED Module.
- ✓ Unique Multioptic lens provide superior lighting distribution with regular 60°, wide 110°, symmetric or asymmetric beam angle.
- ✓ Available for row mounted installations in various lengths.
- ✓ Suitable for surface, suspended, wall mount installations.
- ✓ Extruded aluminum body comes with white, black or grey finish.
- ✓ Also available with custom color options or vinyl decals.
- ✓ LED's are rated for 60,000hrs. L80 with +85CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

SPECIFICATION:

ED VECTORX+ SIZE — SOURCE — RADIANCE — VOLTAGE — DRIVER — MOUNTING — LENS — FINISH — CCT — OPTIONS

Enter the Product Code into the boxes above.

SIZE

_____ Feet

SOURCE

- 10W/Ft LED
- 15W/Ft LED
- 20W/Ft LED*

* UD lighting distribution only.

RADIANCE

- DD - Direct (100%Down)
- UD - Uneven(70%Down/30%Up)**

*Light Distribution.
**Suspended Configuration only.

VOLTAGE

- 120V
- 277V
- 347V*

*Not available for all configurations.

DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- *
- EC - Emergency Circuit
- EM - Emergency**

* Please specify dimming method (ELV).
**Battery Pack per 4Feet section.

MOUNTING

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S Feet*
- WM - Wall Mount
- WF - Wall Flush
- SF - Surface Mount

*Please specify required Length.

FINISH

- WH - White
- BK - Black
- GR - Grey
- CF - Custom RAL#
- VD - Vinyl Decal*

* Please provide 600dpi Image.

LENS

- RB - Regular 60°
- WB - Wide 110°
- SB - Symmetric
- AB - Asymmetric

CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin

*Other options are available.

OPTIONS

- No Options*
- 90 CRI
- DS-Daylight Sensor
- DC - Dual Circuit**
- OS - Occupancy Sensor
- DOS - Daylight & Occupancy Sensor

*Leave Empty.
**Down /Up Control separately.
***Combination example (90CRI/DS).


LUMEN OUTPUT W/Ft:

Watts	30K	35K	40K
10W	1280 lm	1310 lm	1340 lm
15W	1915 lm	1965 lm	2015 lm
20W	2554 lm	2620 lm	2686 lm

Project:

Type:

SIZE:

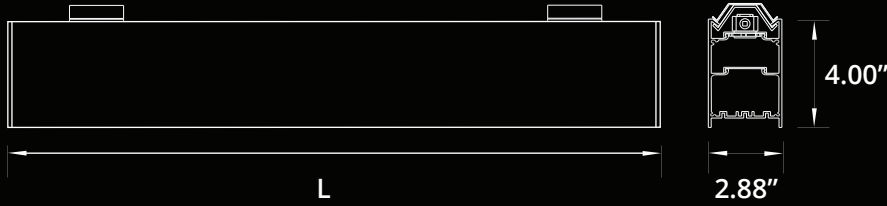

Size	L (LENGTH)	LED Strips
1 Feet	11.24 Inch	1x11"
2 Feet	23.00 Inch	2x11"
3 Feet	33.75 Inch	3x11"
4 Feet	45.50 Inch	4x11"
5 Feet	56.75 Inch	5x11"
6 Feet	68.00 Inch	6x11"
7 Feet	79.25 Inch	7x11"
8 Feet	90.25 Inch	8x11"

RADIANCE:


DIRECT DISTRIBUTION




UNEVEN DISTRIBUTION




MOUNTING:

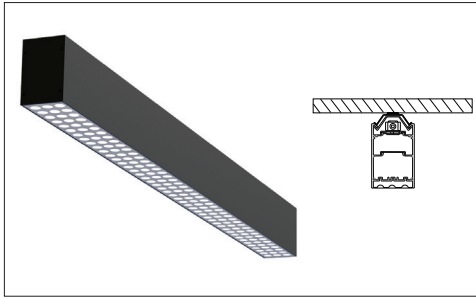

SURFACE MOUNT

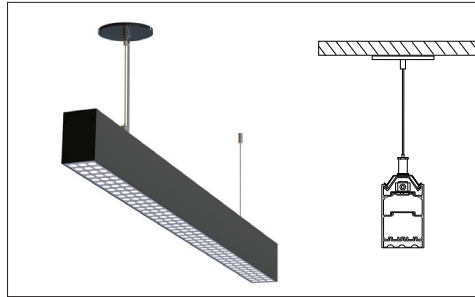


SUSPENDED

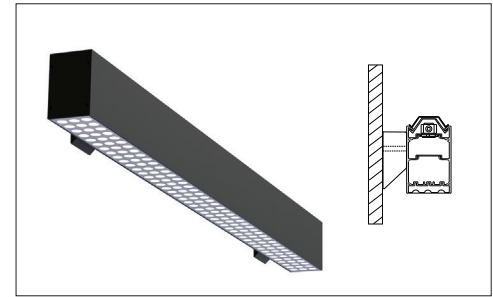


WALL MOUNT

BEAMS:



REGULAR BEAM



WIDE BEAM



SYMMETRIC BEAM



ASYMMETRIC BEAM