



**FEATURES:**

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Available with white aluminum or optional polycarbonate prismatic reflector.
- ✓ Suitable for suspended installation.
- ✓ Aluminum body with integrated driver. Available in white, black and grey finish.
- ✓ LED spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office and commercial installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

**SOURCE**

- 17W LED
- 34W LED

**VOLTAGE**

- 120V
- 277V
- 347V\*

\*Not available for all configurations.

**DRIVER**

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- \*

\* Please specify dimming method (ELV).

**MOUNTING**

- S4-Suspension 4Feet
- S6-Suspension 6Feet
- S  Feet\*

\*Please specify required Length.

**REFLECTOR**

- AL - Aluminum
- PR - Prismatic

**FINISH**

- WH - White
- BK - Black
- GR - Grey

**CCT**

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White\*\* (2700K-6500K)

\*Other options are available.

\*\*Available with Dali controls.


**OPTIONS**

- No Options\*
- 90 CRI

\*Leave Empty.

**DIMENSIONS:**

Height	Width
13.75"	12.25"

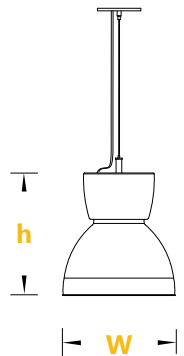

**LUMEN OUTPUT:**

Watts	30K	35K	40K
17W	1950 lm	2000 lm	2050 lm
34W	3900 lm	4000 lm	4100 lm

Project:

Type:

**SPECIFICATION:**

**ED ZEN+**

SOURCE —  VOLTAGE —  DRIVER —  MOUNTING —  REFLECTOR —  FINISH —  CCT —  OPTIONS

Enter the Product Code into the boxes above.