

### FEATURES:

- ✓ Architectural luminaire with direct lighting distribution.
- ✓ Light source: COB LED.
- ✓ Built in frosted lens controls the light and reduce the glare.
- ✓ High efficiency Semi specular reflector is also available in white finish.
- ✓ Square trim comes in white, black and grey colour.
- ✓ Suitable for recessed non insulated ceilings or damp locations.
- ✓ LED Spot is rated for 60,000hrs. L70 with +85 CRI.
- ✓ Has a proven record in office, commercial and retail installations.
- ✓ Custom modifications are available.
- ✓ ED luminaires are certified to CSA and UL Standards.

reinventlight

#### SIZE

- 4 Inch
- 6 Inch

#### SOURCE

- 10W LED
  - 20W LED
  - 30W LED\*
- \* Not available for 4 Inch.

#### VOLTAGE

- 120V
  - 277V
  - 347V\*
- \* Not available for all configurations.

#### DRIVER

- ST - Standard
- DL - 0-10V Dimming (1%)
- DA - DALI
- EM - Emergency
- \*

\* Please specify dimming method (ELV).

#### HOUSING

- NC - New Construction

#### REFLECTOR

- ST - Standard
- WH - White

#### TRIM

- WH - White
- BK - Black
- GR - Grey

#### OPTIONS

- No Options\*
  - 90 CRI
- \*Leave Empty.

#### CCT

- 30K - 3000Kelvin
- 35K - 3500Kelvin
- 40K - 4000Kelvin
- TW - Tunable White\*\* (2700K-6500K)


\*Other options are available.  
 \*\*Available with Dali controls.

#### LUMEN OUTPUT:

Watts	30K	35K	40K
10W	1050 lm	1100 lm	1125 lm
20W	1915 lm	1950 lm	1985 lm
30W	2950 lm	3010 lm	3070 lm

#### DIMENSIONS:

Size	4 Inch	6 Inch
Width	5.937"	7.375"
Height	6.000"	6.875"
Cutout	5.250"	6.625"

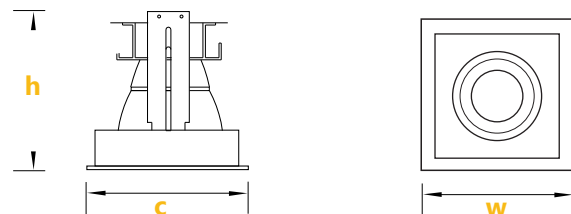

Project: \_\_\_\_\_

Type: \_\_\_\_\_

#### SPECIFICATION:

**ED LS+**  SIZE  SOURCE  VOLTAGE  DRIVER  HOUSING  REFLECTOR  TRIM  CCT  OPTIONS

Enter the Product Code into the boxes above.